



1	2	3	4	5	6
符合RoHS指令要求 CONFORM TO RoHS DNSTRUCTIONS					

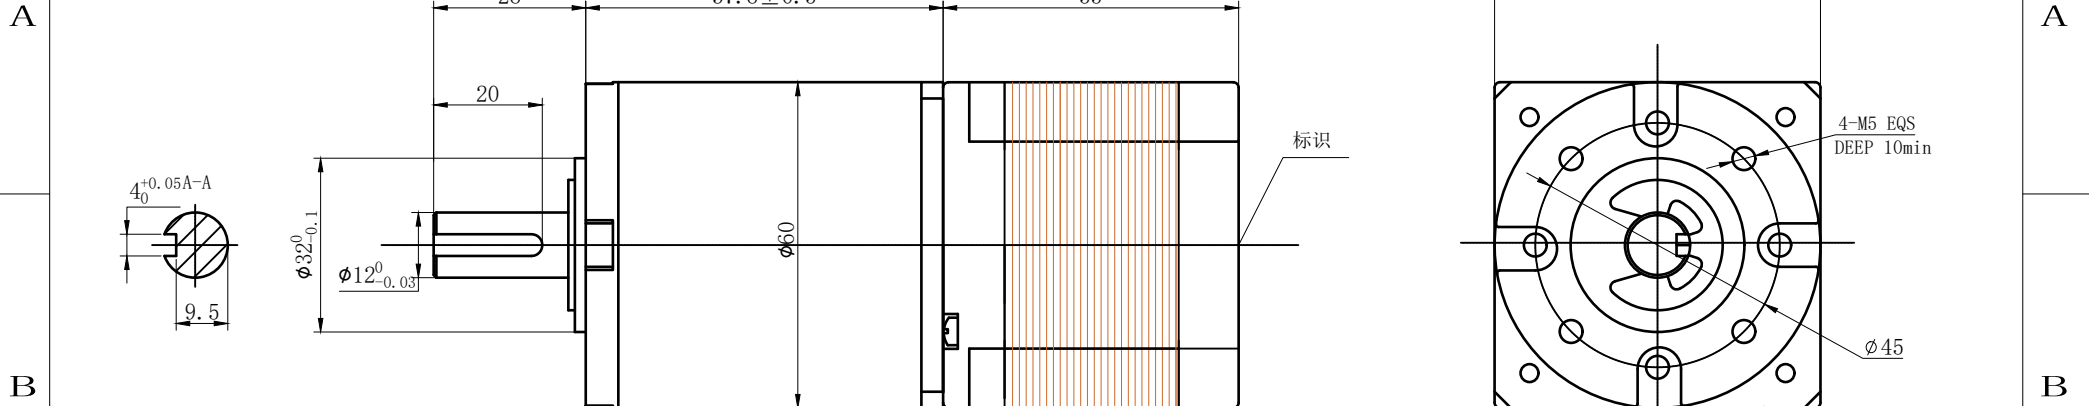

C	特性 <b>character</b>	规格 <b>specifications</b>	<div> <div>ACBD</div> <div>黑绿红蓝</div> <div>winding drawing</div>  </div>	C
	1. 相数 Number of phase	2		
	2. 步距角 Step Angle	1.8°		
	3. 额定电压 Rated Voltage	DC 2.98V		
	4. 额定电流 Rated current	DC 3.5A		
	5. 保持转矩 Holding Torque	≥ 1900mN.m		
	6. 相电阻 Winding resistance	0.85±15% ohm(20℃)		

7. 相电感	$2 \pm 20\% \mu\text{H} (11\text{H}_{10})$				视图		
--------	--------------------------------------------	--	--	--	----	---------------------------------------------------------------------------------------	--

Winding inductance	5±20% mH (1kHz)					view		重庆优摩特科技有限公司 CHONGQING YUMOTEC TECHNOLOGY CO., LTD.
8. 转向 (轴伸向看) Direction of rotation	A-AB-B-CW					比例 inverse	1:1	

D	9. 转动惯量 Rotor Inertia	300 g.cm²			proportion				Chongqing UMot technology Co.Ltd.	D
	10. 电机重量 Weight	0.7Kg						A0		

11. 绝缘等级 Insulation class	B Class	标记 REV	修改内容 Description	日期 Date	设计 INSPECTED	审核 CHECKED	批准 APPROVED	日期 Date	版本 Version	型号 Model	60HS5405-60PG4J-500
------------------------------	---------	-----------	---------------------	------------	-----------------	---------------	----------------	------------	---------------	-------------	---------------------

1	2	3	4	5	6
---	---	---	---	---	---