
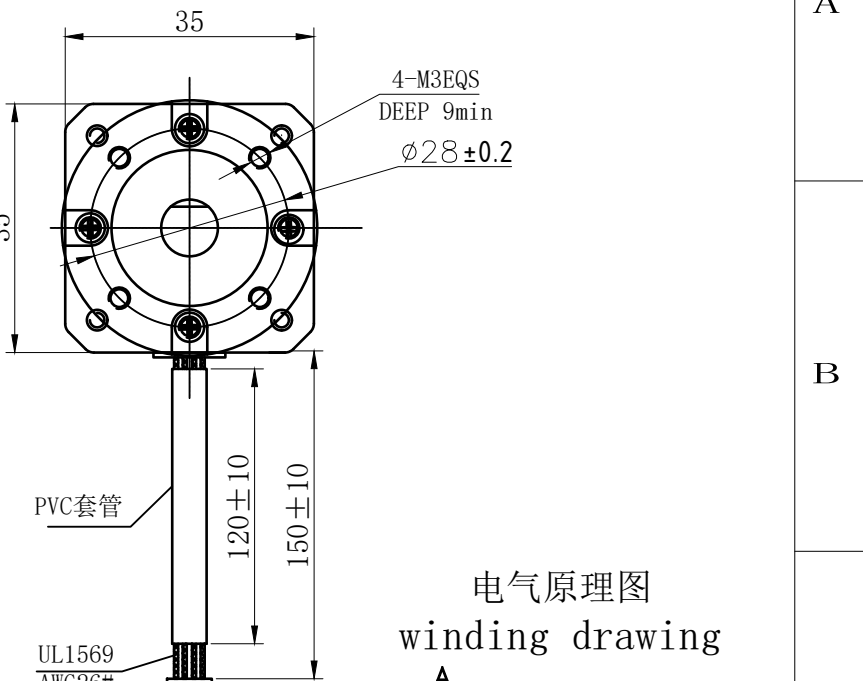


|  |   |   |   |   |   |
|--|---|---|---|---|---|
| 1  | 2 | 3 | 4 | 5 | 6 |
| 符合RoHS指令要求<br>CONFORM TO RoHS DNSTROCTIONS |   |   |   |   |   |

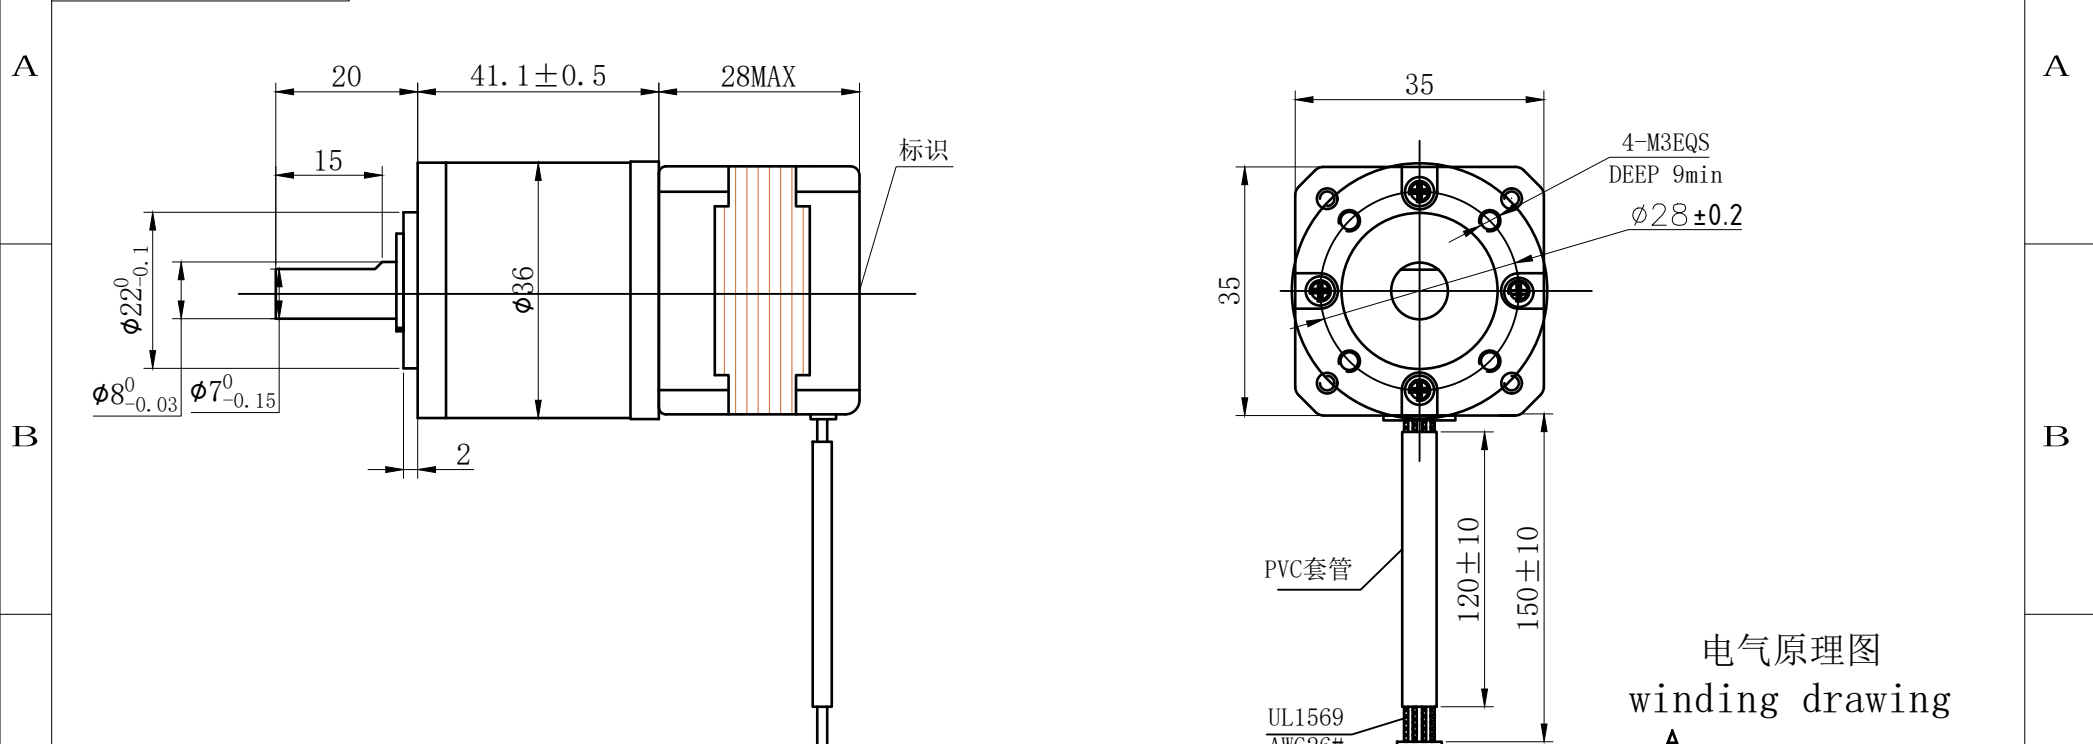

減速比: 1/51

|   |                                      |                          |   |                     |            |                 |               |                |            |               |             |                       |   |
|---|--------------------------------------|--------------------------|---|---------------------|------------|-----------------|---------------|----------------|------------|---------------|-------------|-----------------------|---|
| C | 特性 <b>character</b>                  | 规格 <b>specifications</b> |   |                     |            |                 |               |                |            |               |             |                       | C |
|   | 1. 相数<br>Number of phase             | 2                        | <div><div><div><div><div></div><div></div><div></div><div></div><div></div><div></div></div><div>AWG26#<br/>SM-04<br/>母座</div><div>黄红橙棕<br/>DBCA</div></div><div>减速比：1/51</div><div><div><div><div>BRN</div><div>C</div><div>ORG</div></div><div><div><div><div></div><div></div><div></div><div></div><div></div><div></div></div><div>B RED</div><div>D YEL</div></div></div><div>M</div></div></div></div></div> |                     |            |                 |               |                |            |               |             |                       |   |
|   | 2. 步距角<br>Step Angle                 | 1.8°                     |   |                     |            |                 |               |                |            |               |             |                       |   |
|   | 3. 额定电压<br>Rated Voltage             | DC 4.5V                  |   |                     |            |                 |               |                |            |               |             |                       |   |
|   | 4. 额定电流<br>Rated current             | DC 1.0A                  |   |                     |            |                 |               |                |            |               |             |                       |   |
|   | 5. 保持转矩<br>Holding Torque            | ≥ 200mN.m                |   |                     |            |                 |               |                |            |               |             |                       |   |
| D | 6. 相电阻<br>Winding resistance         | 4.5±15% ohm(20℃)         |   |                     |            |                 |               |                |            |               |             |                       | D |
|   | 7. 相电感<br>Winding inductaoce         | 5.5±20% mH (1kHz)        |   |                     |            |                 |               |                |            |               |             |                       |   |
|   | 8. 转向（轴伸向看）<br>Direction of rotation | A-AB-B-CW                |   |                     |            |                 |               |                |            |               |             |                       |   |
|   | 9. 转动惯量<br>Rotor Inertia             | 25 g.cm²                 |   |                     |            |                 |               |                |            |               |             |                       |   |
|   | 10. 电机重量<br>Weight                   | 0.15Kg                   |   |                     |            |                 |               |                |            |               |             |                       |   |
|   | 11. 绝缘等级<br>Insulation class         | B Class                  | 标记<br>REV   | 修改内容<br>Description | 日期<br>Date | 设计<br>INSPECTED | 审核<br>CHECKED | 批准<br>APPROVED | 日期<br>Date | 版本<br>Version | 型号<br>Model | 35HSH2408-36PG51J-150 |   |
| 1 |                                      | 2                        |   | 3                   |            | 4               |               | 5              |            | 6             |             |                       |   |