

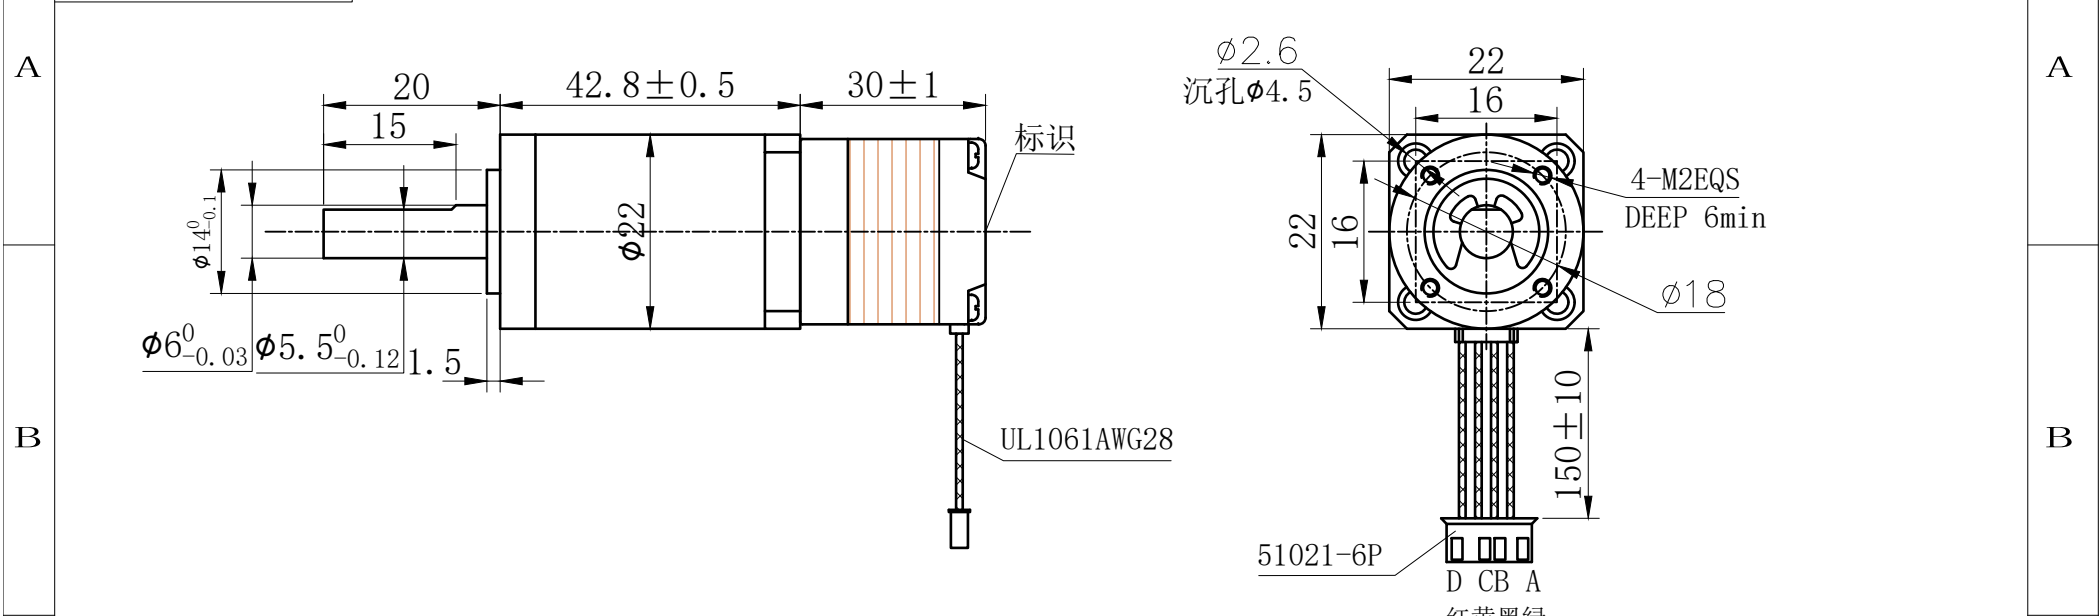
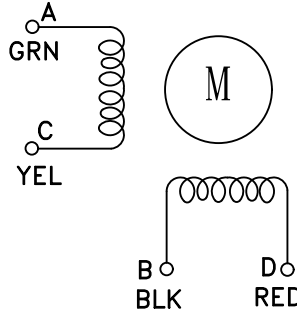


1	2	3	4	5	6
符合RoHS指令要求 CONFORM TO RoHS DNSTROCTIONS					

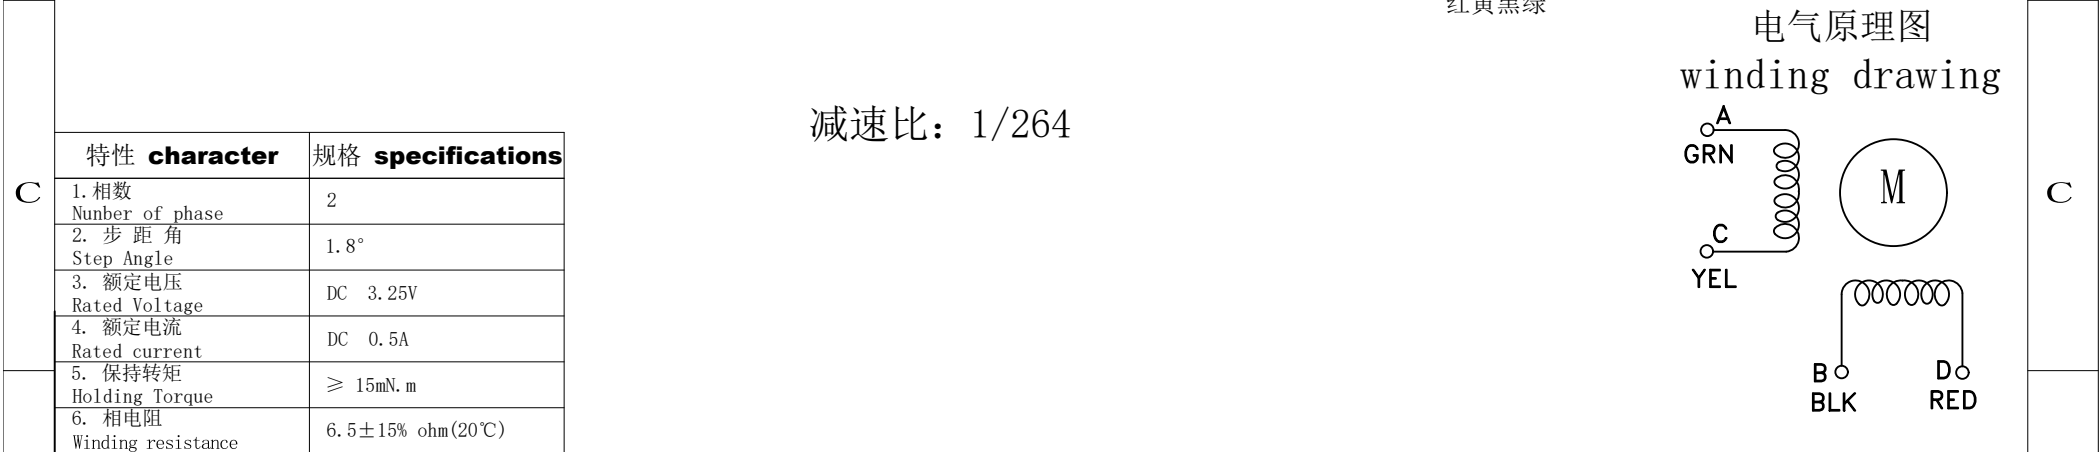

C			<div> <div>红黄黑绿</div> <div>电气原理图</div> <div>winding drawing</div>  </div>	C		
	特性 character	规格 specifications				
	1. 相数 Number of phase	2				
	2. 步 距 角 Step Angle	1.8°				
	3. 额定电压 Rated Voltage	DC 3.25V				
	4. 额定电流 Rated current	DC 0.5A				
	5. 保持转矩 Holding Torque	≥ 15mN.m				
	6. 相电阻 Winding resistance	6.5±15% ohm(20℃)				

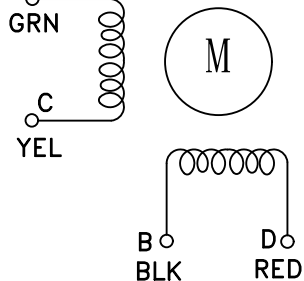

C	特性 character		规格 specifications		减速比: 1/204												C						
	1. 相数 Nunber of phase		2																				
	2. 步距角 Step Angle		1.8°																				
	3. 额定电压 Rated Voltage		DC 3.25V																				
	4. 额定电流 Rated current		DC 0.5A																				
	5. 保持转矩 Holding Torque		≥ 15mN.m																				
D	6. 相电阻 Winding resistance		6.5±15% ohm(20℃)														D						
	7. 相电感 Winding inductaoce		1.5±20% mH (1kHz)																				
	8. 转向（轴伸向看） Directlon of rotation		A-AB-B-CW																				
	9. 转动惯量 Rotor Inertia		2 g.cm²																				
	10. 电机重量 Weight		0.06Kg																				
	11. 绝缘等级 Insulation class		B Class		标记 REV		修改内容 Description		日期 Date		设计 INSPECTED		审核 CHECKED		批准 APPROVED			日期 Date		版本 Version		型号 Model	
1			2			3			4			5			6								