
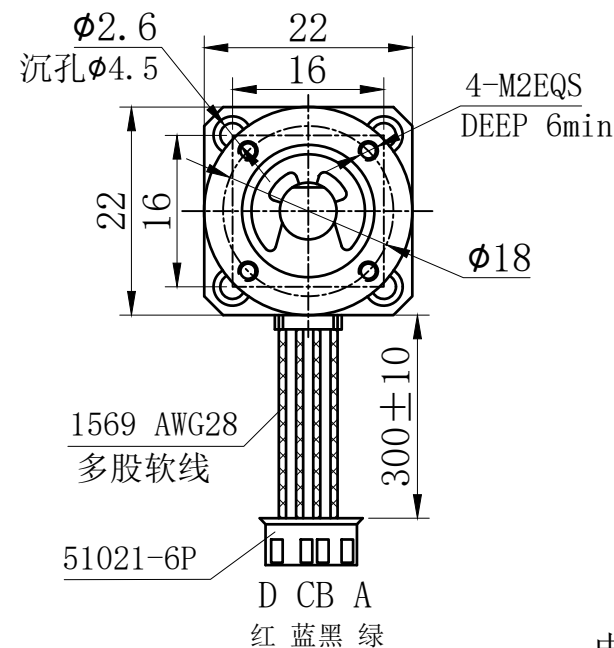


符合RoHS指令要求
CONFORM TO RoHS DNSTROCTIONS

A

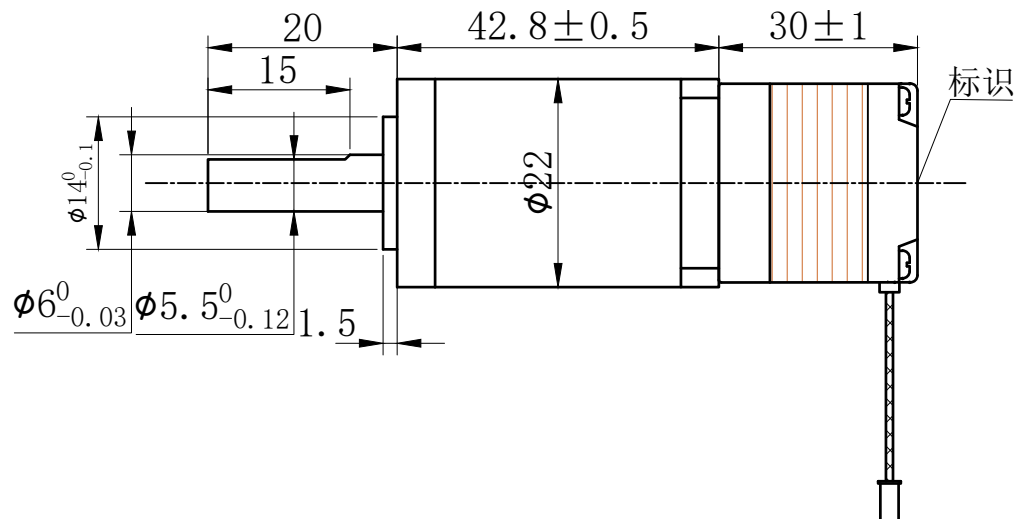

B

A


B

C

特性 character	规格 specifications
1. 相数 Number of phase	2
2. 步 距 角 Step Angle	1.8°
3. 额定电压 Rated Voltage	DC 3.25V
4. 额定电流 Rated current	DC 0.5A
5. 保持转矩 Holding Torque	≥ 15mN.m
6. 相电阻 Winding resistance	6.5±15% ohm(20℃)
7. 相电感 Winding inductaoce	1.5±20% mH (1kHz)
8. 转向(轴伸向看) Direction of rotation	A-AB-B-CW
9. 转动惯量 Rotor Inertia	2 g.cm ²
10. 电机重量 Weight	0.06Kg
11. 绝缘等级 Insulation class	B Class

減速比: 1/189

电气原理图
winding drawing




D

D

UMot

视图
view



1 : 1

重庆优摩特科技有限公司
Chongqing UMot technology Co.Ltd.

AC

设计
INSPECTED

审核
CHECKER

批准
APPROVE

日期	Date
----	------

版本	Version
----	---------

型号	Model
----	-------

20HS1405-22PG189.J-300C