



符合RoHS指令要求


CONFORM TO RoHS DNSTROCTIONS

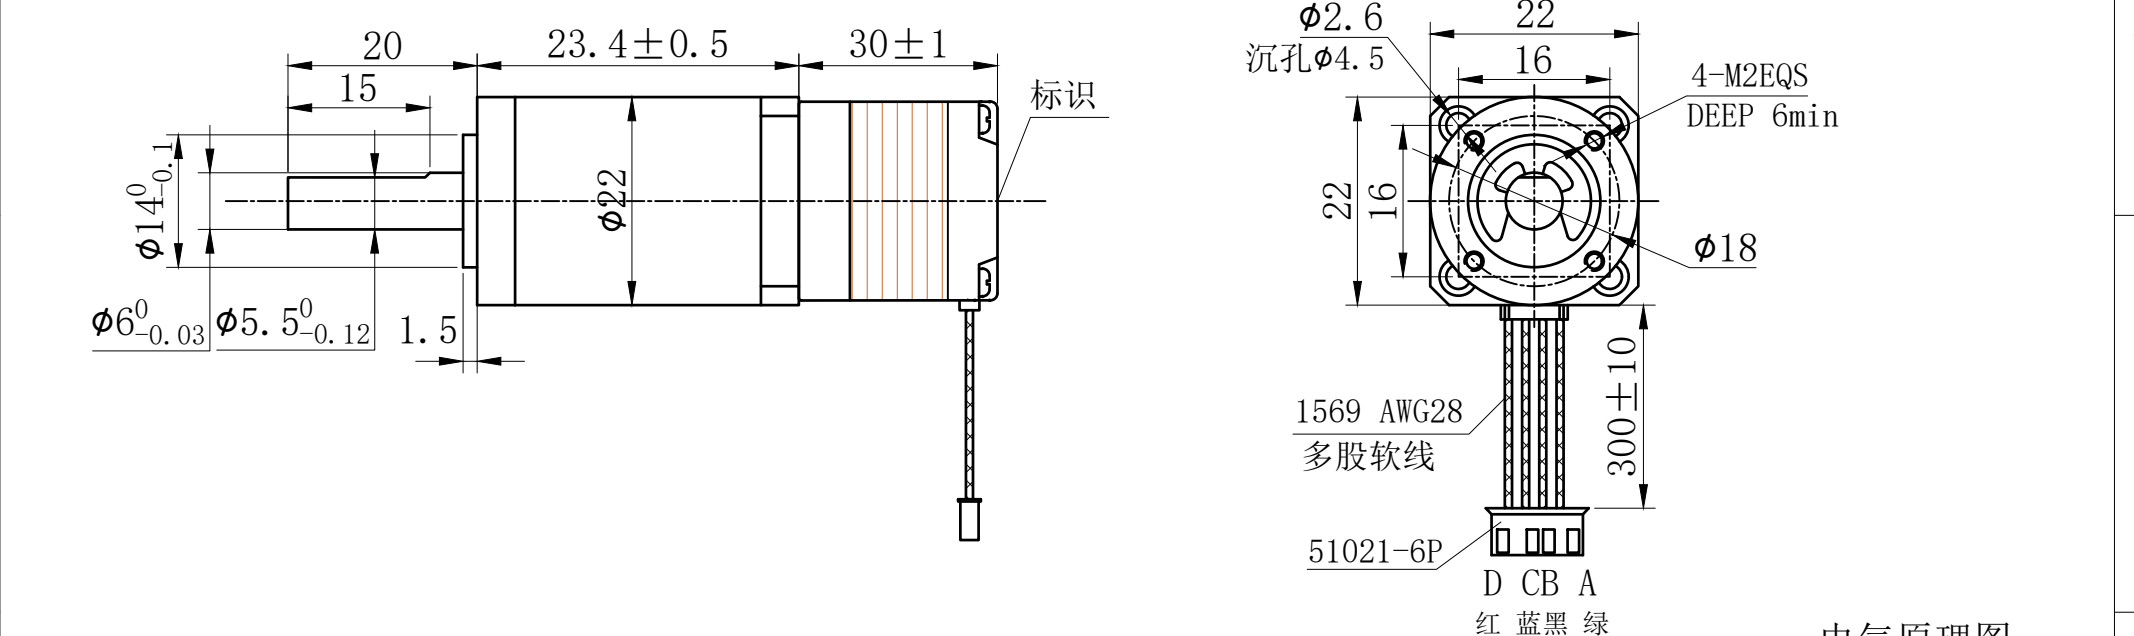

特性 character	规格 specifications
1. 相数 Number of phase	2
2. 步 距 角 Step Angle	1.8°
3. 额定电压 Rated Voltage	DC 3.25V
4. 额定电流 Rated current	DC 0.5A
5. 保持转矩 Holding Torque	≥ 15mN.m
6. 相电阻 Winding resistance	6.5 ± 15% ohm(20℃)
7. 相电感 Winding inductaoce	1.5 ± 20% mH (1kHz)
8. 转向 (轴伸向看) Directlon of rotation	A-AB-B-CW
9. 转动惯量 Rotor Inertia	2 g.cm²
10. 电机重量 Weight	0.06Kg
11. 绝缘等级 Insulation class	B Class

减速比：1/5.2

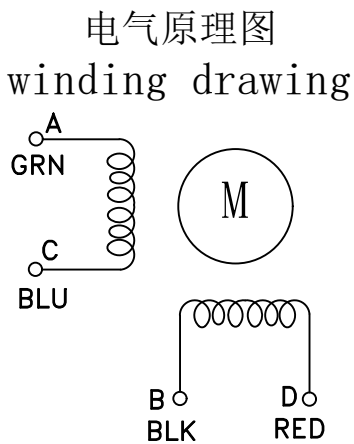

7. 相电感 Winding inductaoce	1.5±20% mH (1kHz)	C	线序C由黄色修改为蓝色	2023/3/24	UMot		视图 view				重庆优摩特科技有限公司 Chongqing UMot technology Co.Ltd.	
8. 转向（轴伸向看） Directlon of rotation	A-AB-B-CW	300	线长由150mm修改为300mm	2023/3/24			比例 inverse proportion		1：1			
9. 转动惯量 Rotor Inertia	2 g.cm²											
10. 电机重量 Weight	0.06Kg							A0				
11. 绝缘等级 Insulation class	B Class	标记 REV	修改内容 Description	日期 Date	设计 INSPECTED	审核 CHECKED	批准 APPROVED	日期 Date	版本 Version	型号 Model	20HS1405-22PG5J-300C	