
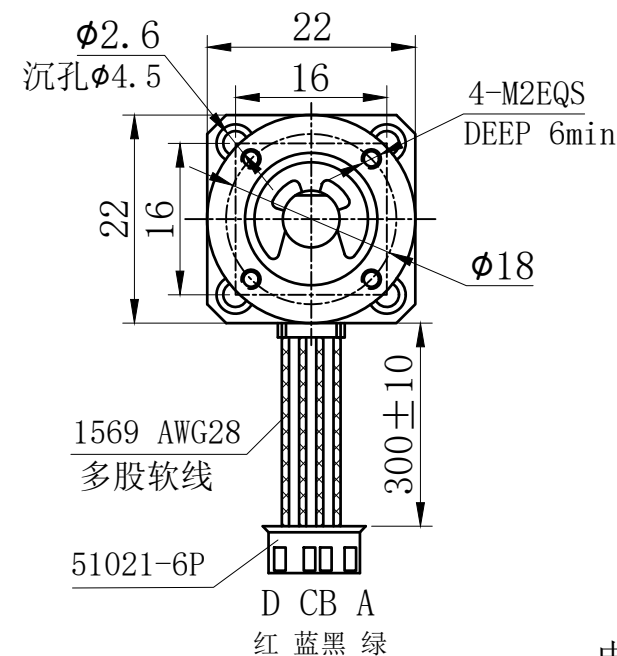


符合RoHS指令要求
CONFORM TO RoHS DNSTRUCTIONS

A

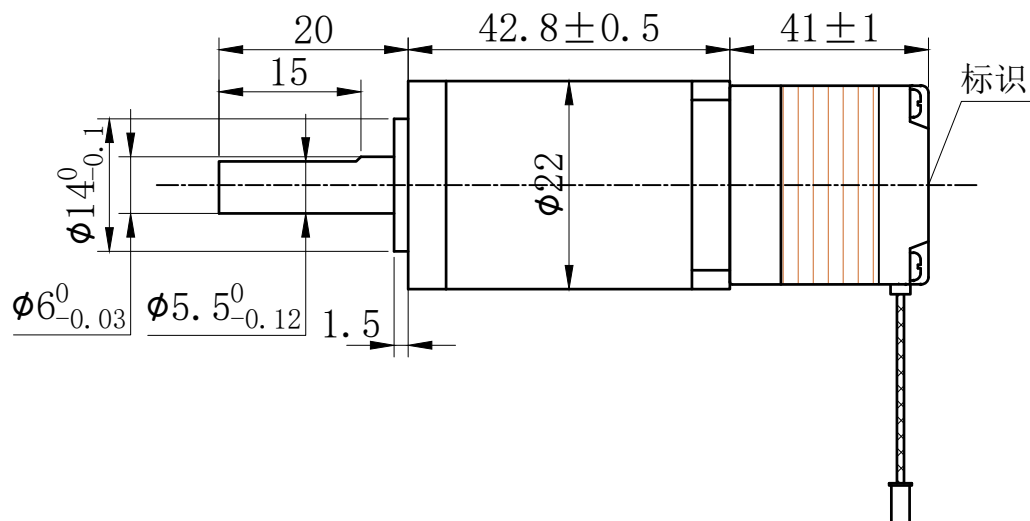

B

A

B

C

特性 character	规格 specifications
1. 相数 Number of phase	2
2. 步 距 角 Step Angle	1.8°
3. 额定电压 Rated Voltage	DC 4.4V
4. 额定电流 Rated current	DC 0.8A
5. 保持转矩 Holding Torque	≥ 30mN.m
6. 相电阻 Winding resistance	5.5±15% ohm(20℃)
7. 相电感 Winding inductaoce	1.5±20% mH (1kHz)
8. 转向 (轴伸向看) Direction of rotation	A-AB-B-CW
9. 转动惯量 Rotor Inertia	3 g.cm ²
10. 电机重量 Weight	0.1Kg
11. 绝缘等级 Insulation class	B Class


減速比: 1/264

D

C

D

电气原理图
winding drawing



UMot

视图
view

inverse
proportion

AC

重庆优摩特科技有限公司
Chongqing UMot technology Co.Ltd.

型号 Model	20HS6401-22PG264J-300C
-------------	------------------------

1

2

3

4

5

E