

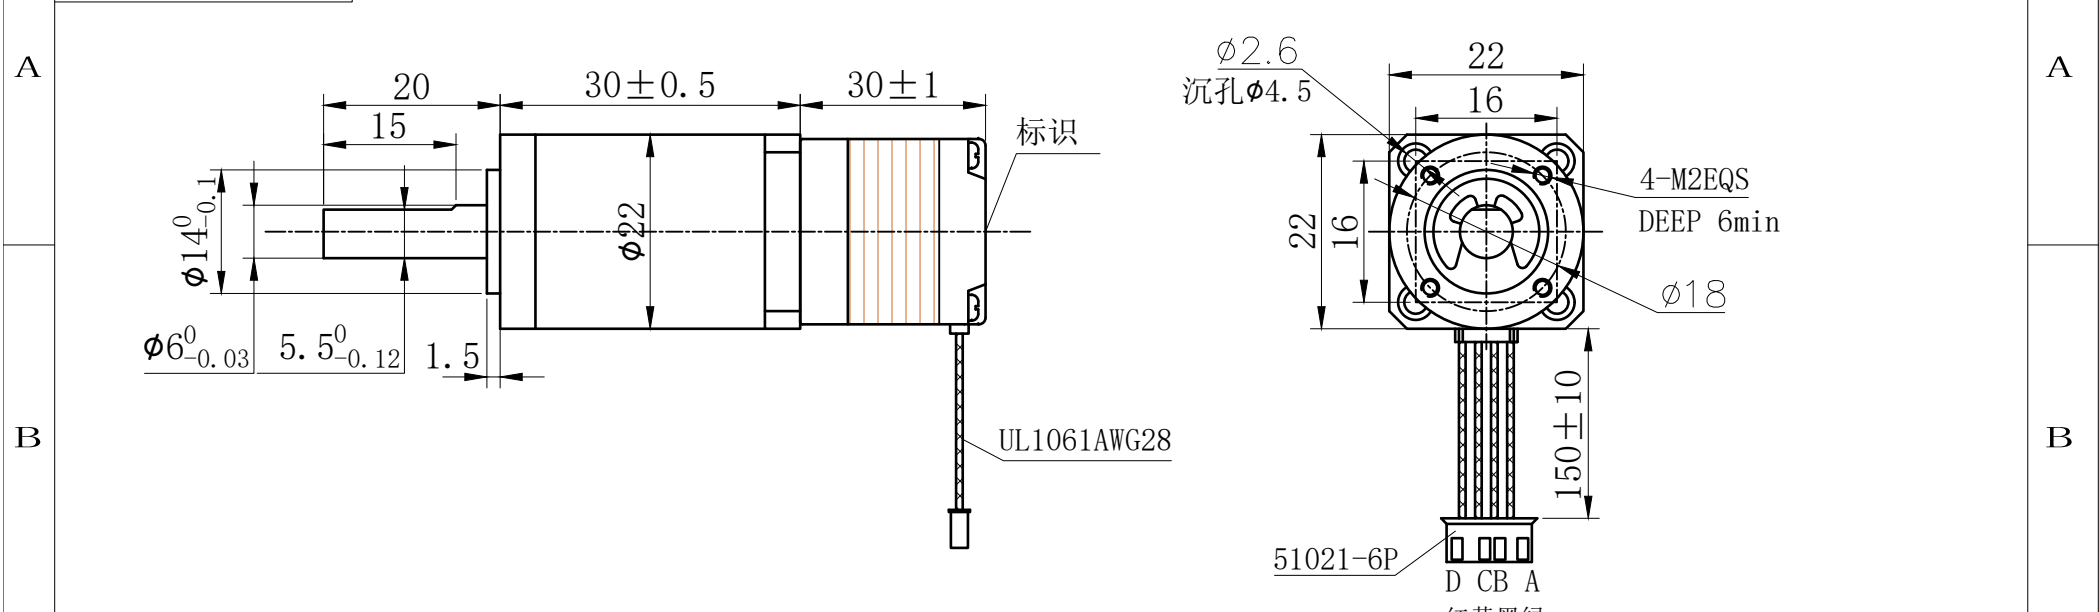
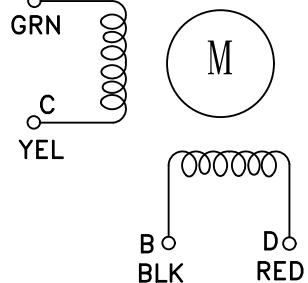


1	2	3	4	5	6
符合RoHS指令要求 CONFORM TO RoHS DNSTROCTIONS					



特性	character	规格	specifications	减速比: 1/27	
----	-----------	----	----------------	-----------	---

C	特性 <b>character</b>	规格 <b>specifications</b>	减速比: 1/27												C	
	1. 相数 Nunber of phase	2														
	2. 步 距 角 Step Angle	1.8°														
	3. 额定电压 Rated Voltage	DC 3.25V														
	4. 额定电流 Rated current	DC 0.5A														
D	5. 保持转矩 Holding Torque	≥ 15mN.m												重庆优摩特科技有限公司 Chongqing UMot technology Co.Ltd.		D
	6. 相电阻 Winding resistance	6.5±15% ohm(20℃)														
	7. 相电感 Winding inductaoce	1.5±20% mH (1kHz)														
	8. 转向 (轴伸向看) Direction of rotation	A-AB-B-CW														
	9. 转动惯量 Rotor Inertia	2 g.cm²												AO		
	10. 电机重量 Weight	0.06Kg														
	11. 绝缘等级 Insulation class	B Class														
	标记 REV	修改内容 Description	日期 Date	设计 INSPECTED	审核 CHECKED	批准 APPROVED	日期 Date	版本 Version	型号 Model	20HS1405-22PG27J-150						

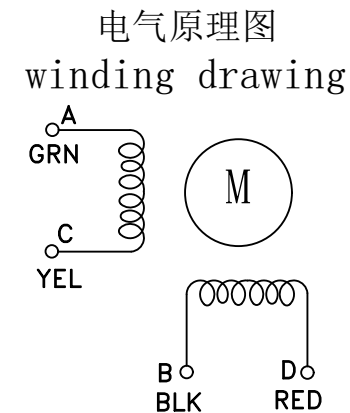

# UMot

vi

比例  
inverse  
proportion

1:

A0

重庆优摩特科技有限公司  
Chongqing UMot technology Co.Ltd.

20HS1405-22PG27J-150