



符合RoHS指令要求  
CONFORM TO RoHS DNSTROCTIONS

A


A

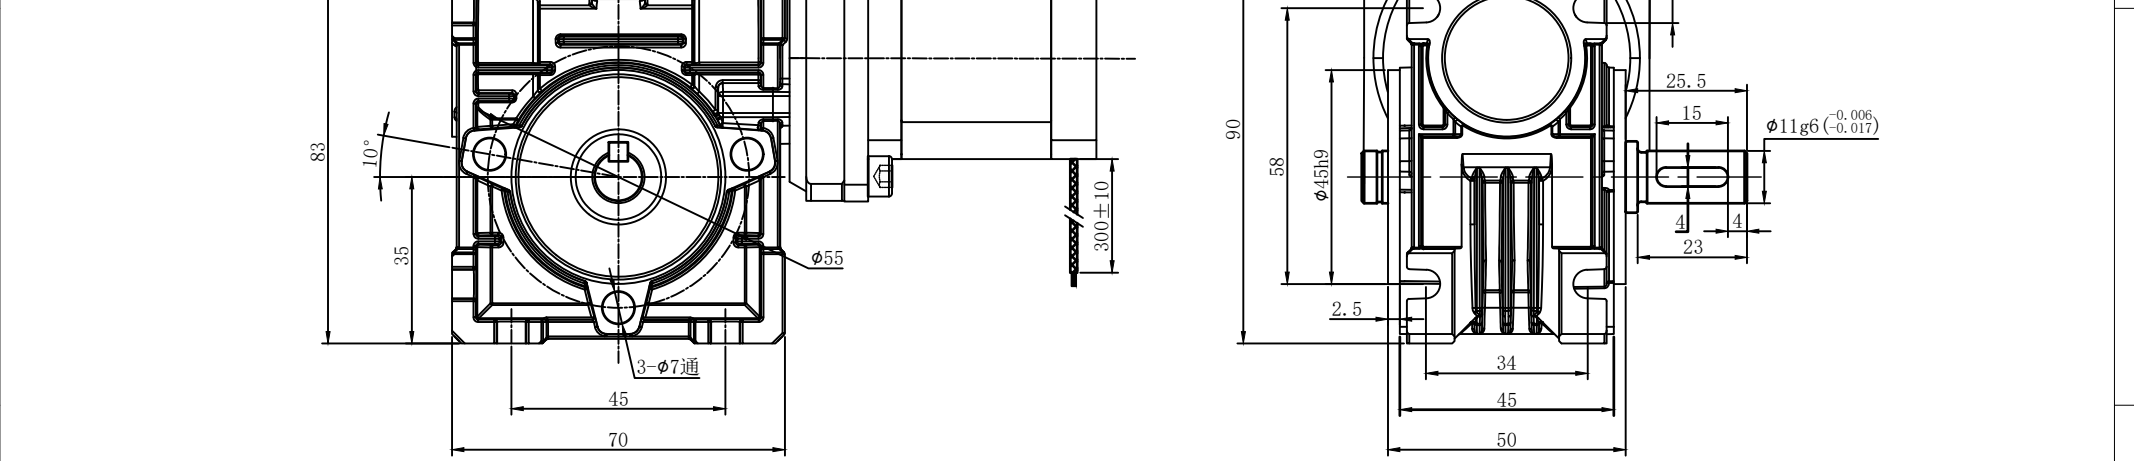

特性 character	规格 specifications
1. 相数 Number of phase	2
2. 步 距 角 Step Angle	1.8°
3. 额定电压 Rated Voltage	DC 2.77V
4. 额定电流 Rated current	DC 1.68A
5. 保持转矩 Holding Torque	≥ 500mN.m
6. 相电阻 Winding resistance	1.65±15% ohm(20℃)
7. 相电感 Winding inductaoce	2.8±20% mH (1kHz)
8. 转向 (轴伸向看) Directlon of rotation	A-AB-B-CW
9. 转动惯量 Rotor Inertia	68 g.cm²
10. 电机重量 Weight	0.35Kg
11. 绝缘等级 Insulation class	B Class



减速比:  
5 / 7.5 / 10 / 15 / 20 /  
25 / 30 / 40 / 50 / 60

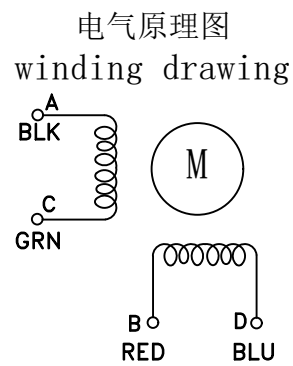

7. 相电感 Winding inductaoce	2.8±20% mH (1kHz)				UMot		视图 view				重庆优摩特科技有限公司 Chongqing UMot technology Co.Ltd.	
8. 转向（轴伸向看） Directlon of rotation	A-AB-B-CW						比例 inverse proportion		1：1			
9. 转动惯量 Rotor Inertia	68 g.cm²											
10. 电机重量 Weight	0.35Kg								A0			
11. 绝缘等级 Insulation class	B Class	标记 REV	修改内容 Description	日期 Date	设计 INSPECTED	审核 CHECKED	批准 APPROVED	日期 Date	版本 Version	型号 Model	42HSC6411-88TS-JMF1-300	