


符合RoHS指令要求
CONFORM TO RoHS DNSTROCTIONS

A

A

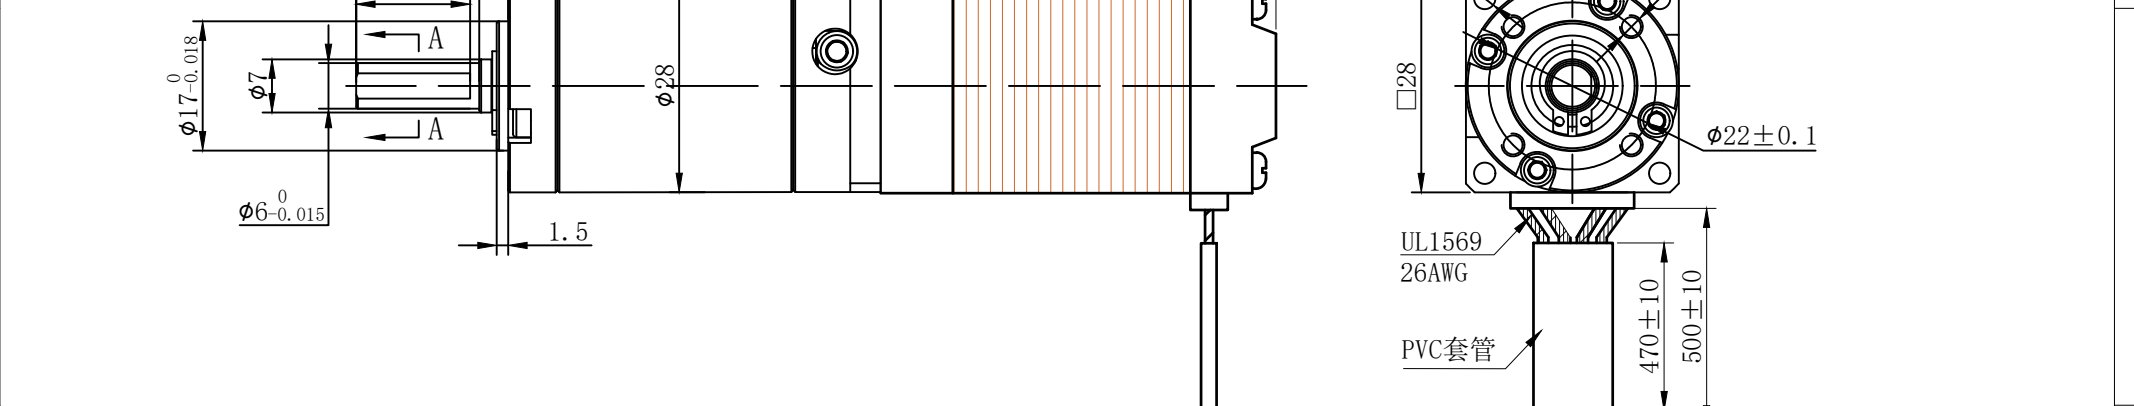

特性 character	规格 specifications
1. 相数 Number of phase	2
2. 步 距 角 Step Angle	1.8°
3. 额定电压 Rated Voltage	DC 6.03V
4. 额定电流 Rated current	DC 0.67A
5. 保持转矩 Holding Torque	≥ 110mN.m
6. 相电阻 Winding resistance	9±10% ohm(20℃)
7. 相电感 Winding inductaoce	7±20% mH (1kHz)
8. 转向 (轴伸向看) Directlon of rotation	A-AB-B-CW
9. 转动惯量 Rotor Inertia	45 g.cm²
10. 电机重量 Weight	0.25Kg
11. 绝缘等级 Insulation class	B Class

Technical drawing of a circular part with a diameter dimension of 5.5-0.1.

减速比：200:1

Wiring diagram showing a motor (M) connected to a coil with terminals BLK, C, GRN, B (RED), and D (BLU).

			<div> <div>UMot</div> <div> <div>视图 view</div> <div>比例 inverse proportion</div> </div> </div> <div> <div> </div> <div>1 : 1</div> </div>		<div> <div>重庆优摩特科技有限公司</div> <div>Chongqing UMot technology Co.Ltd.</div> </div>								
									阳祥	李佳兴		2023 02/13	A0
标记 REV	修改内容 Description	日期 Date							设计 INSPECTED	审核 CHECKED	批准 APPROVED	日期 Date	版本 Version
							型号 Model	28HS7401-28PG200JM-500					