


符合RoHS指令要求
CONFORM TO RoHS DNSTRUCTIONS

A

A

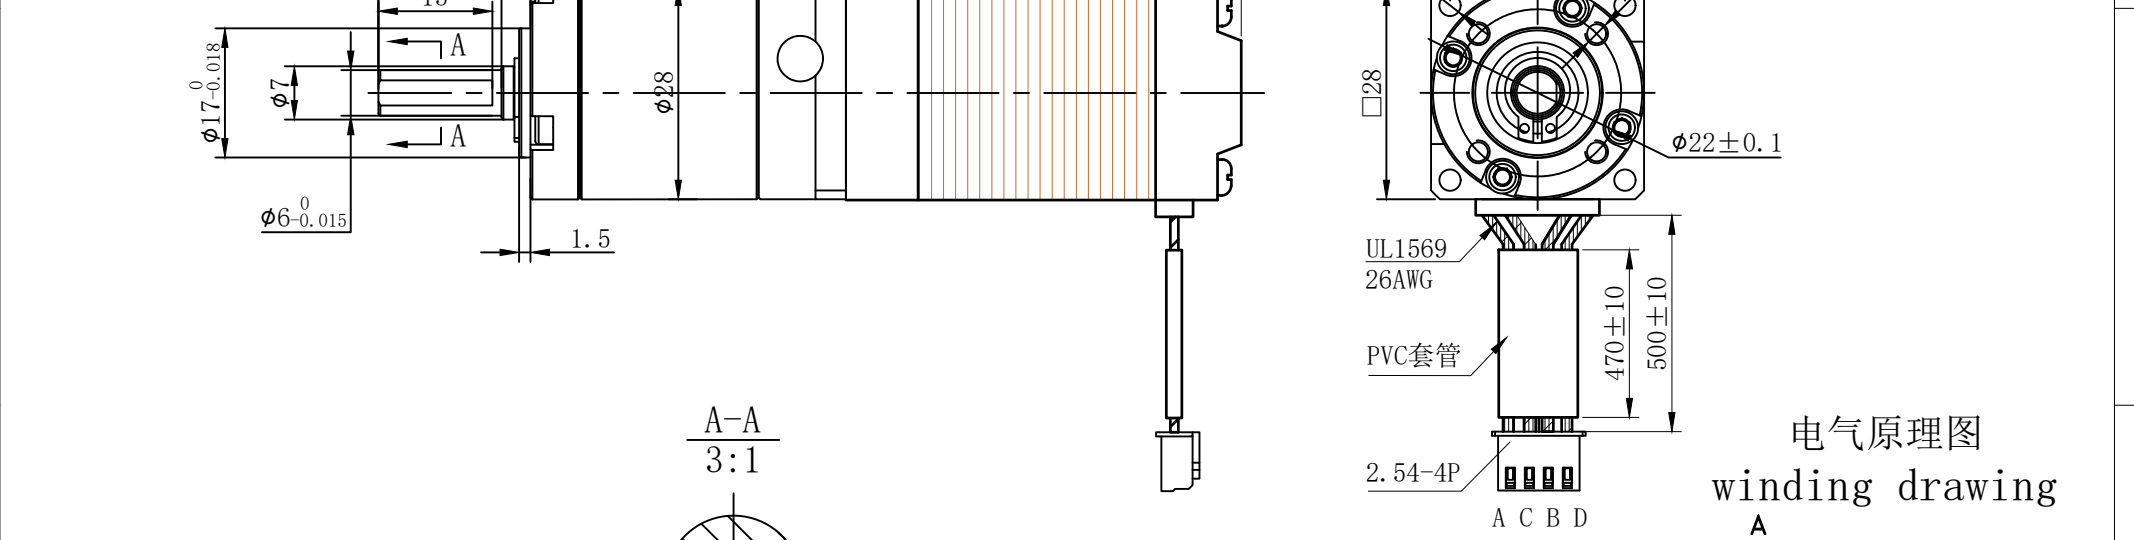

特性 character	规格 specifications
1. 相数 Number of phase	2
2. 步 距 角 Step Angle	1.8°
3. 额定电压 Rated Voltage	DC 6.03V
4. 额定电流 Rated current	DC 0.67A
5. 保持转矩 Holding Torque	≥ 110mN.m
6. 相电阻 Winding resistance	9 \pm 10% ohm(20℃)
7. 相电感 Winding inductaoce	7 \pm 20% mH (1kHz)
8. 转向 (轴伸向看) Directlon of rotation	A-AB-B-CW
9. 转动惯量 Rotor Inertia	45 g.cm ²
10. 电机重量 Weight	0.25Kg
11. 绝缘等级 Insulation class	B Class

<div>3:1</div> <div>5.5\pm0.1</div>				减速比：50:1							
				UMot		视图 view		比例 inverse proportion		1:1	
										重庆优摩特科技有限公司 Chongqing UMot technology Co.Ltd.	
				阳祥 李佳兴		2023 02/13		A0			
				设计 审核 批准		日期 版本		型号		28HS7401-28PG50JM-500	
				INSPECTED CHECKED APPROVED		Date Version		Model			