


符合RoHS指令要求

CONFORM TO RoHS DNSTROCTIONS

A

A

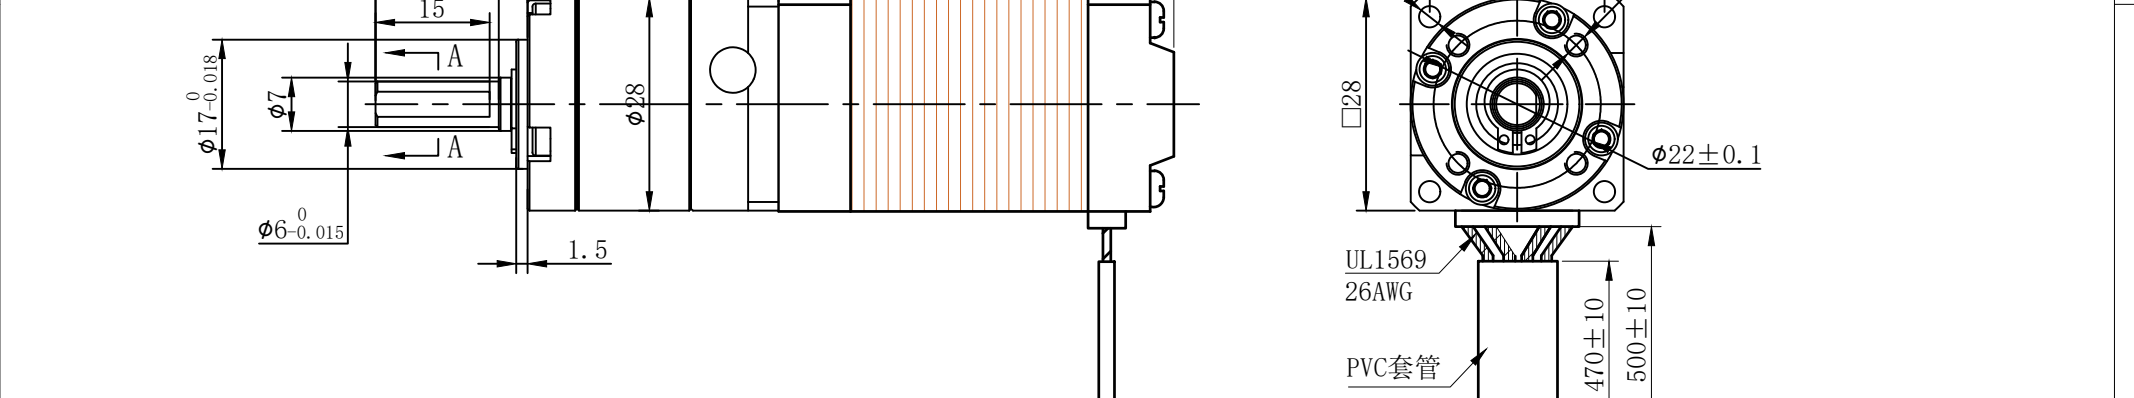

特性 character	规格 specifications
1. 相数 Number of phase	2
2. 步 距 角 Step Angle	1.8°
3. 额定电压 Rated Voltage	DC 6.03V
4. 额定电流 Rated current	DC 0.67A
5. 保持转矩 Holding Torque	≥ 110mN.m
6. 相电阻 Winding resistance	9±10% ohm(20℃)
7. 相电感 Winding inductaoce	7±20% mH (1kHz)
8. 转向 (轴伸向看) Directlon of rotation	A-AB-B-CW
9. 转动惯量 Rotor Inertia	45 g.cm²
10. 电机重量 Weight	0.25Kg
11. 绝缘等级 Insulation class	B Class

减速比：7:1

电气原理图  
winding drawing

Winding diagram showing motor terminals A, B, C, D and their connections to BLK, GRN, RED, and BLU wires.

特性 character				规格 specifications				视图 view				比例 inverse proportion				重庆优摩特科技有限公司 Chongqing UMot technology Co.Ltd.			
1. 相数 Number of phase				2				2023 02/13				A0				型号 Model			
2. 步 距 角 Step Angle				1.8°				2023 02/13				A0				28HS7401-28PG7JM-500			
3. 额定电压 Rated Voltage				DC 6.03V				2023 02/13				A0				28HS7401-28PG7JM-500			
4. 额定电流 Rated current				DC 0.67A				2023 02/13				A0				28HS7401-28PG7JM-500			
5. 保持转矩 Holding Torque				≥ 110mN.m				2023 02/13				A0				28HS7401-28PG7JM-500			
6. 相电阻 Winding resistance				9±10% ohm(20℃)				2023 02/13				A0				28HS7401-28PG7JM-500			
7. 相电感 Winding inductaoce				7±20% mH (1kHz)				2023 02/13				A0				28HS7401-28PG7JM-500			
8. 转向 (轴伸向看) Directlon of rotation				A-AB-B-CW				2023 02/13				A0				28HS7401-28PG7JM-500			
9. 转动惯量 Rotor Inertia				45 g.cm²				2023 02/13				A0				28HS7401-28PG7JM-500			
10. 电机重量 Weight				0.25Kg				2023 02/13				A0				28HS7401-28PG7JM-500			
11. 绝缘等级 Insulation class				B Class				2023 02/13				A0				28HS7401-28PG7JM-500			