


符合RoHS指令要求
CONFORM TO RoHS DNSTROCTIONS

A

A

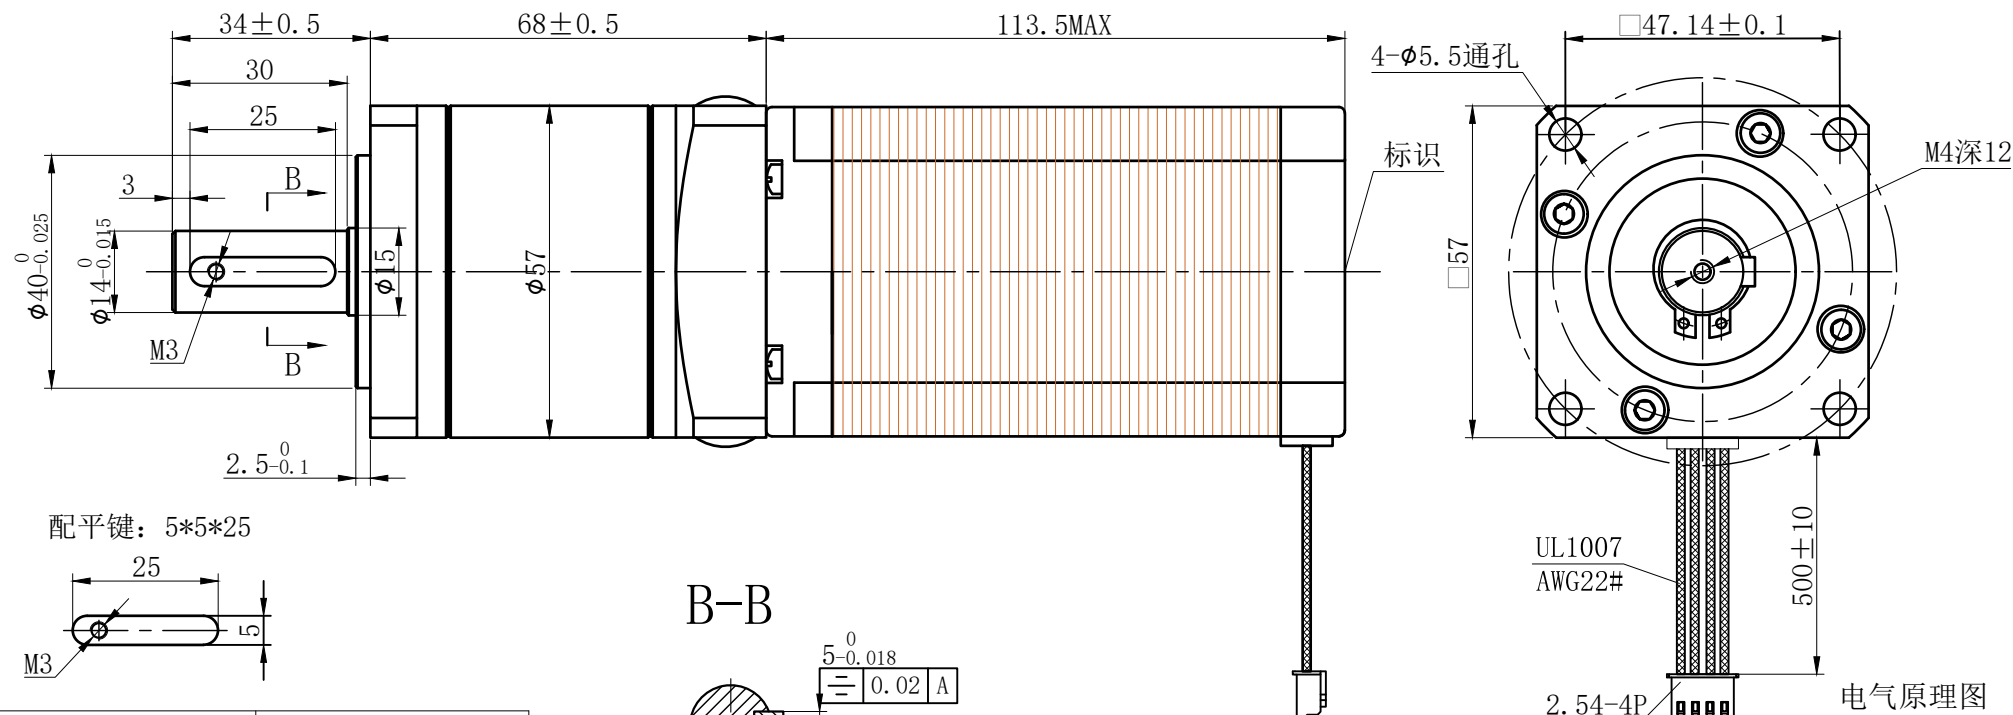

特性 character	规格 specifications
1. 相数 Number of phase	2
2. 步 距 角 Step Angle	1.8°
3. 额定电压 Rated Voltage	DC 3.6V
4. 额定电流 Rated current	DC 4.5A
5. 保持转矩 Holding Torque	≥ 3600mN.m
6. 相电阻 Winding resistance	0.8±15% ohm(20℃)
7. 相电感 Winding inductaoce	3.5±20% mH (1kHz)
8. 转向（轴伸向看） Direction of rotation	A-AB-B-CW
9. 转动惯量 Rotor Inertia	680 g.cm ²
10. 电机重量 Weight	1.7Kg
11. 绝缘等级 Insulation class	B Class

Technical drawing of a shaft with a keyway. The shaft has a diameter of $16^{+0}_{-0.1}$ mm. The keyway has a width of $5^{+0.018}_0$ mm. The detail view shows a key with a width of 0.02 mm and a height of A mm.

減速比: 50:1

C


C

D

D

UMot

视图
view

 $1:1$

重庆优摩特科技有限公司
Chongqing UMot technology Co.Ltd.

阳祥

李佳兴

2023
00 / 10

A0

设计

审核

批准

日期

版本	
----	--

型号

57HS11402-57PG50PM-500