


符合RoHS指令要求
CONFORM TO RoHS DNSTRUCTIONS

A

A

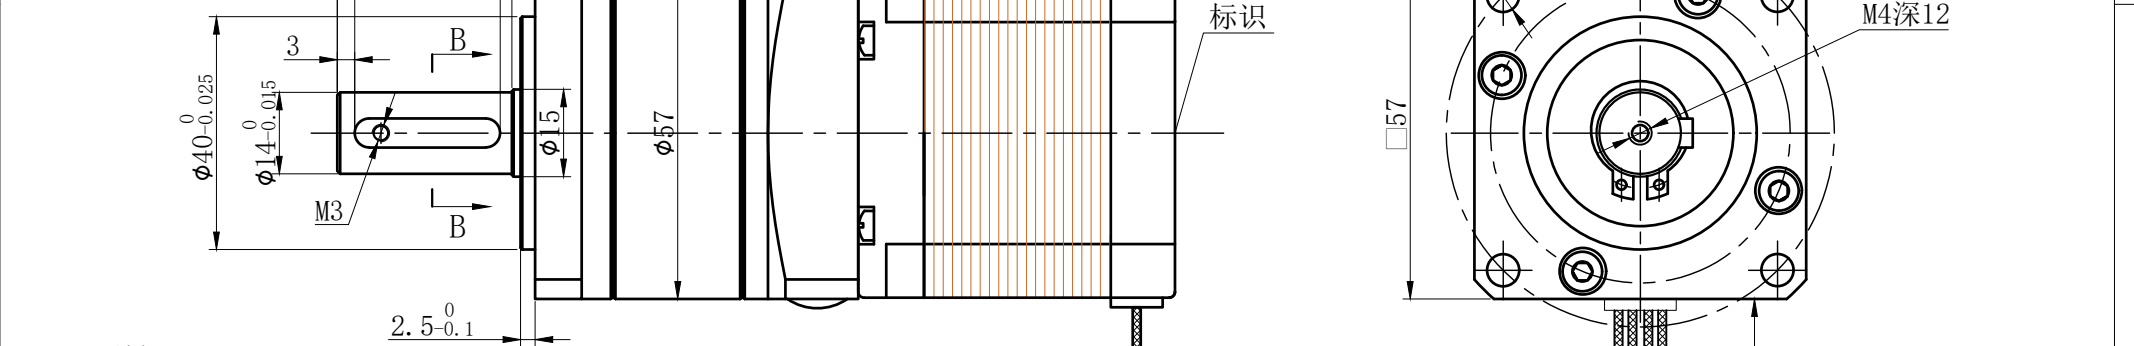

特性 character	规格 specifications																
1. 相数 Number of phase	2																
2. 步距角 Step Angle	1.8°																
3. 额定电压 Rated Voltage	DC 1.7V																
4. 额定电流 Rated current	DC 2A																
5. 保持转矩 Holding Torque	≥ 950mN.m																
6. 相电阻 Winding resistance	0.85±15% ohm(20℃)																
7. 相电感 Winding inductaoce	2.5±20% mH (1kHz)																
8. 转向(轴伸向看) Directlon of rotation	A-AB-B-CW																
9. 转动惯量 Rotor Inertia	200 g.cm²																
10. 电机重量 Weight	0.64Kg																
11. 绝缘等级 Insulation class	B Class																

减速比: 4:1

电气原理图
winding drawing

					视图 view		比例 inverse proportion		重庆优摩特科技有限公司 Chongqing UMot technology Co.Ltd.			
					UMot		1:1					
					阳祥	李佳兴		2023 02/13	A0			
					设计	审核	批准	日期	版本	型号	57HS5417-57PG4PM-500	
					INSPECTED	CHECKED	APPROVED	Date	Version	Model		