


符合RoHS指令要求
CONFORM TO RoHS DNSTROCTIONS

Technical drawing of a mechanical part, likely a piston or cylinder component, showing dimensions in millimeters. The drawing includes a side view and a cross-sectional view.


Dimensions:

- Overall length: 52MAX
- Distance from left face to center of pin: 42.7 ± 0.5
- Distance from left face to start of pin: 20
- Distance from left face to start of pin (alternative dimension): 15
- Pin diameter: $\phi 17_{-0.1}^0$
- Pin length: 5.5 ± 0.12
- Pin hole diameter: $\phi 6_{-0.03}^0$
- Pin hole position: 2
- Pin hole diameter (alternative dimension): $\phi 28$

The drawing shows a cylindrical body with a pin inserted through it. The pin has a diameter of $\phi 17_{-0.1}^0$ and a length of 5.5 ± 0.12. The pin is positioned 20 mm from the left face and 42.7 ± 0.5 mm from the center of the body. The body has a total length of 52MAX. The pin hole has a diameter of $\phi 6_{-0.03}^0$ and is located 2 mm from the left face. The pin hole diameter is also indicated as $\phi 28$.

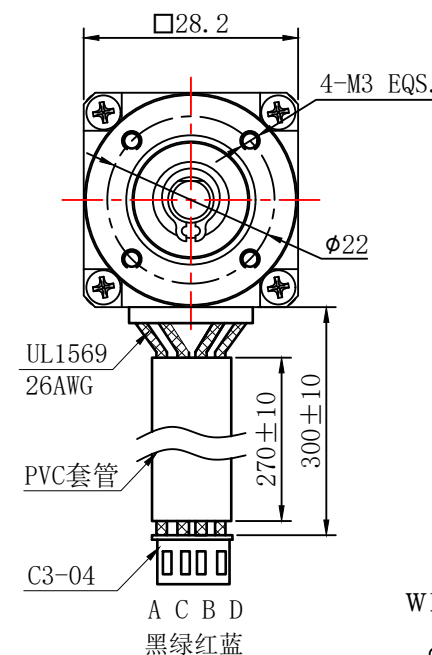


电气原理图
winding drawing



減速比: 1:64

特性 character	规格 specifications
1. 相数 Number of phase	2
2. 步 距 角 Step Angle	1.8°
3. 额定电压 Rated Voltage	DC 6.03V
4. 额定电流 Rated current	DC 0.67A
5. 保持转矩 Holding Torque	≥ 110mN.m
6. 相电阻 Winding resistance	9.0±10% ohm(20℃)
7. 相电感 Winding inductaoce	7.0±20% mH (1kHz)
8. 转向(轴伸向看) Direction of rotation	A-AB-B-CW
9. 转动惯量 Rotor Inertia	45 g.cm ²
10. 电机重量 Weight	0.37Kg
11. 绝缘等级 Insulation class	B Class

			UMot		视图 view			重庆优摩特科技有限公司 Chongqing UMot technology Co.Ltd.		
					比例 inverse proportion	1： 1				
										A0
标记 REV	修改内容 Description	日期 Date	设计 INSPECTED	审核 CHECKED	批准 APPROVED	日期 Date	版本 Version	型号 Model	28HS7401-28PG64JZS-300	