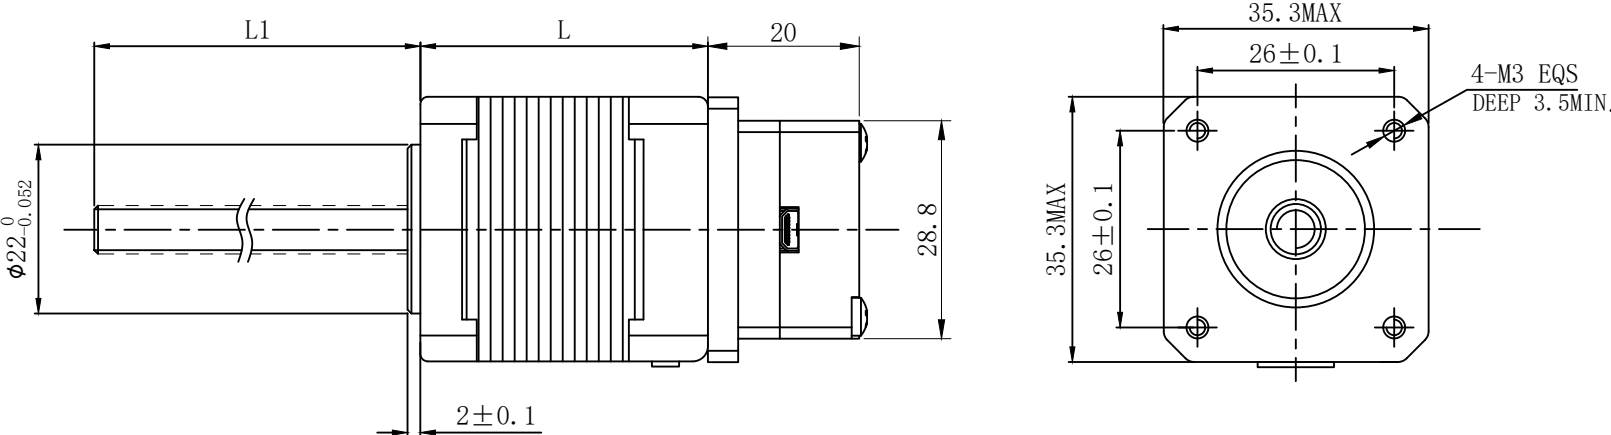
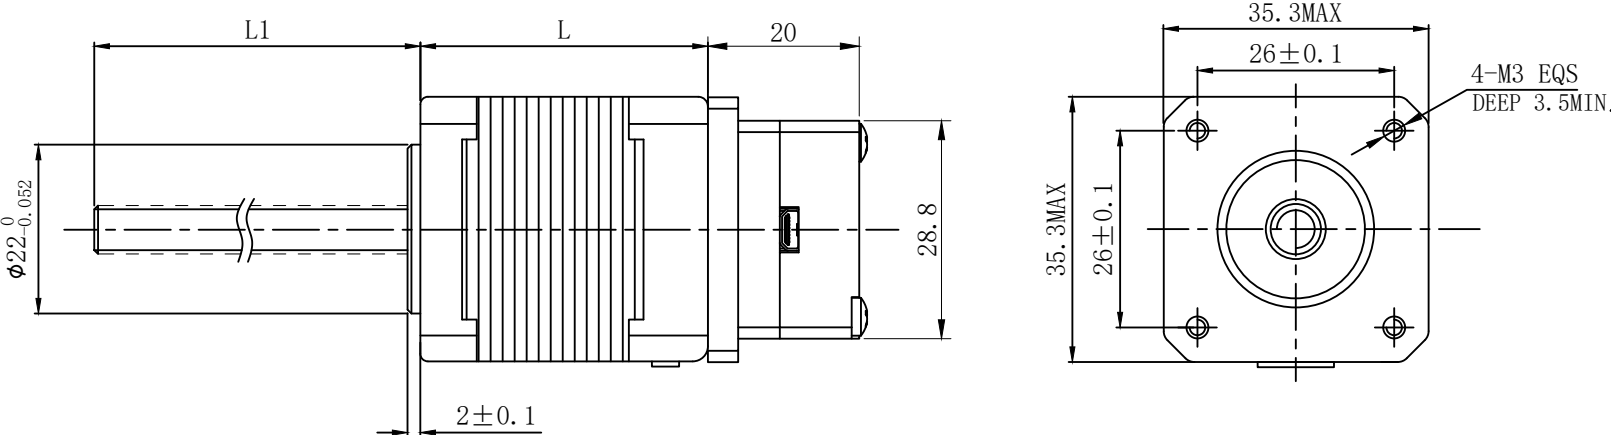



A	1	2		3	4		5		6			
	符合RoHS指令要求 CONFORM TO RoHS DNSTROCTIONS			可选规格	保持转矩 (mN.m)	额定电流 (A)	相电阻 (Ω)	额定电压 (V)	转动惯量 (g-cm²)	机身长度 (mm)-L		
				35HSH3401-XX	170	1.0	2.7	2.7	45	32.5		
				35HSH5401-XX	250	1.0	4.5	4.5	30	38.5		
				35HSH6402-XX	280	1.0	6	2.5	45	45.5		
B												
C												
D	丝杆直径		导程		步长		<div><div>视图 view</div><div>比例 inverse proportion</div></div> <div><div></div><div>1 : 1</div></div> <div><div>重庆优摩特科技有限公司</div><div>Chongqing UMot technology Co.Ltd.</div></div>					
	5mm		2mm		0.01mm							
	5mm		4mm		0.02mm							
	6.35mm		3.175mm		0.0158mm							
	8mm		2mm		0.01mm							
			4mm		0.02mm							
			8mm		0.04mm							
			12mm		0.06mm							
	20mm		0.1mm									
	1		2		3		4		5		6	