



符合RoHS指令要求
CONFORM TO RoHS INSTRUCTIONS

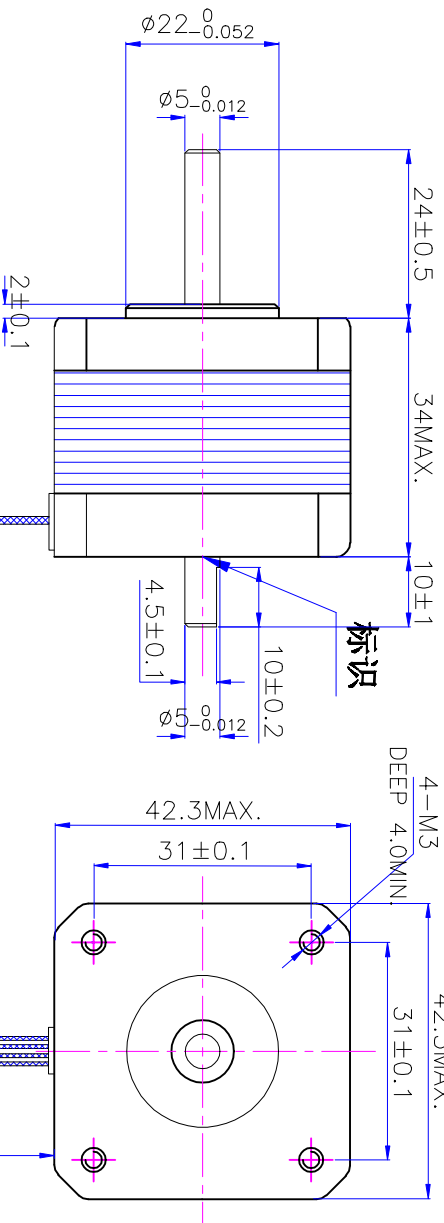

电气原理图
winding drawing




特性 character 规格 specifications

1. 相数 Number of phase	2
2. 步距角 Step Angle	1.8°
3. 额定电压 Rated Voltage	DC 2.93V
4. 额定电流 Rated current	DC 1.33A
5. 保持转矩 Holding Torque	$\geq 270\text{mN}\cdot\text{m}$
6. 相电阻 Winding resistance	$2.2 \pm 15\%$ ohm (20°C)
7. 相电感 Winding inductance	$3.5 \pm 20\%$ mH (1KHz)
8. 转向 (轴伸方向) Direction of rotation	A-AB-B-CW
9. 转动惯量 Rotor Inertia	30 g·cm ²
10. 电机重量 Weight	0.22Kg
11. 绝缘等级 Insulation class	B Class

标记 REV	修改内容 Description	日期 Date

UMot

视图
View
比例
Inverse
proportion



1 : 1

重庆优摩特科技有限公司
Chongqing Umot technology Co. Ltd.

设计 INSPECTED	审核 CHECKED	批准 APPROVED	日期 Date	版本 Version	型号 Model
				A0	42HSC1409-2410B-200