


符合RoHS指令要求
CONFORM TO RoHS DNSTROCTIONS

A

A

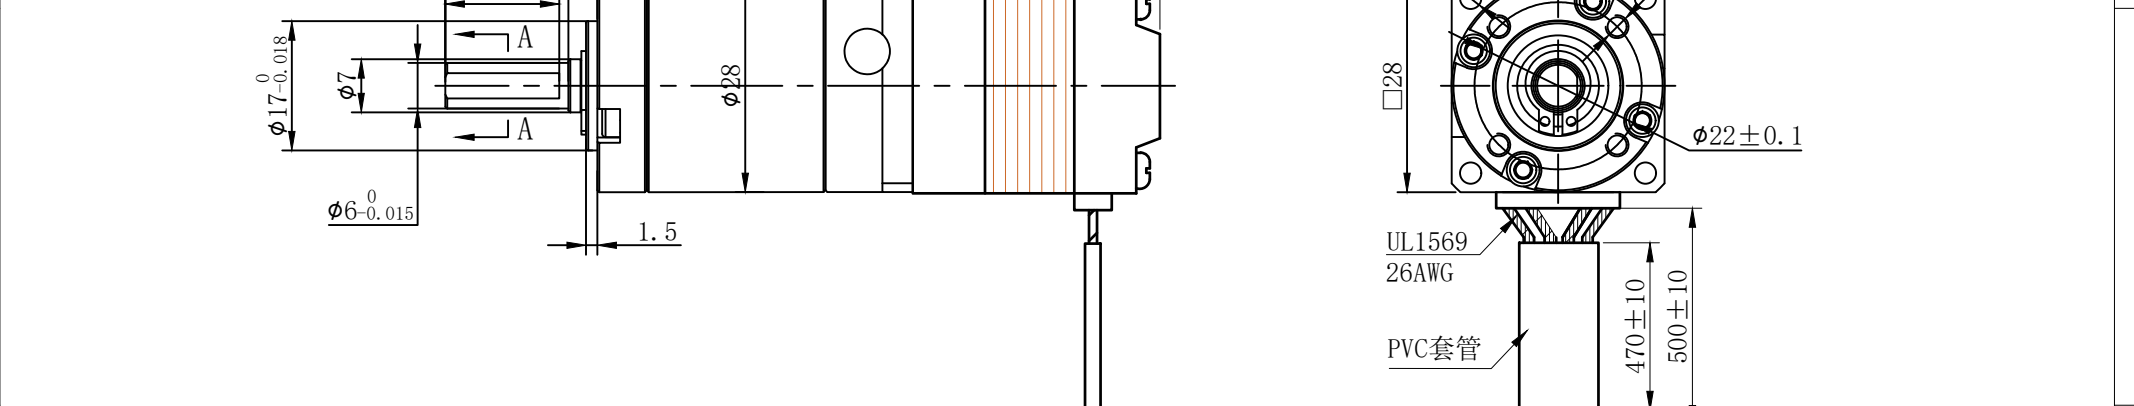

特性 character	规格 specifications
1. 相数 Number of phase	2
2. 步 距 角 Step Angle	1.8°
3. 额定电压 Rated Voltage	DC 3.88V
4. 额定电流 Rated current	DC 0.67A
5. 保持转矩 Holding Torque	≥ 70mN.m
6. 相电阻 Winding resistance	5.8±10% ohm(20℃)
7. 相电感 Winding inductaoce	4.2±20% mH (1kHz)
8. 转向 (轴伸向看) Directlon of rotation	A-AB-B-CW
9. 转动惯量 Rotor Inertia	15 g.cm²
10. 重量 Weight	0.26Kg
11. 绝缘等级 Insulation class	B Class

电气原理图
winding drawing

Winding diagram showing motor terminals A (BLK), C (GRN), B (RED), and D (BLU) connected to a motor symbol M.

减速比: 25:1

UMot				视图 view	1:1		重庆优摩特科技有限公司 Chongqing UMot technology Co.Ltd.	
阳祥		李佳兴		比例 inverse proportion		A1		
设计 INSPECTED	审核 CHECKED	批准 APPROVED	日期 Date	日期 Date	版本 Version	型号 Model	28HS2401-28PG25JM-500	