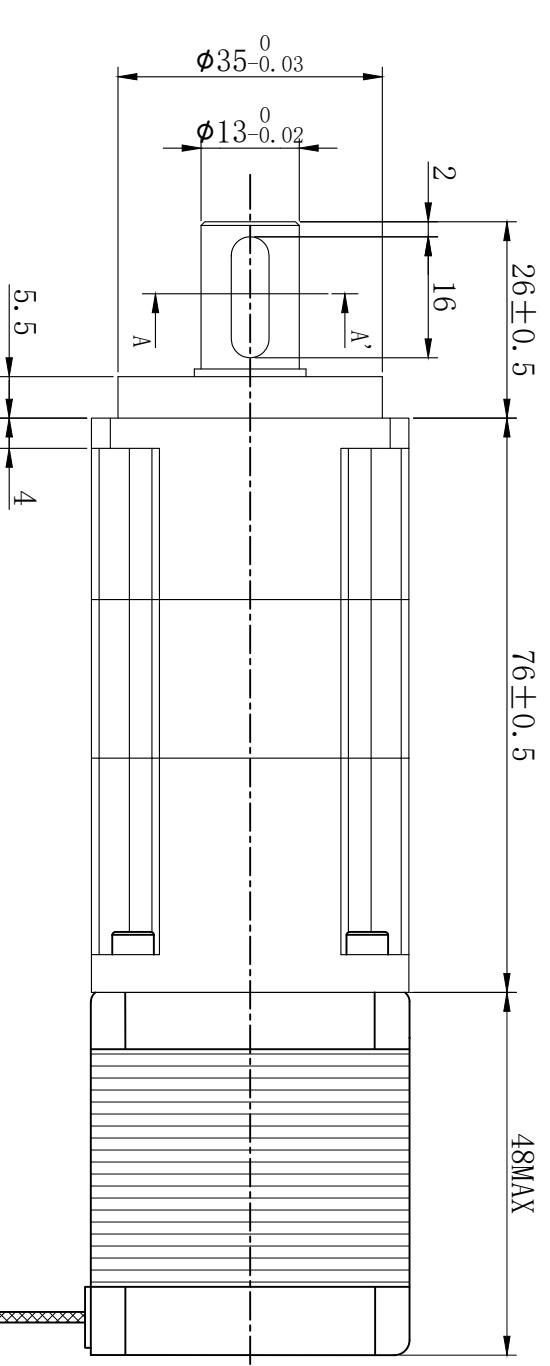
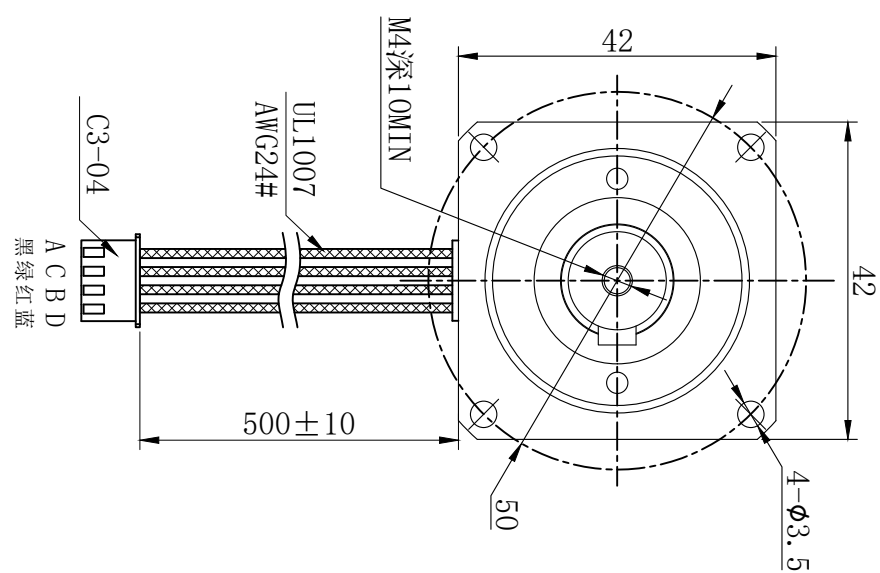

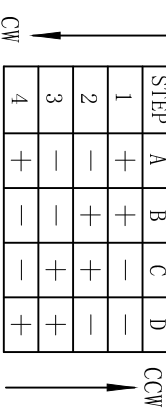

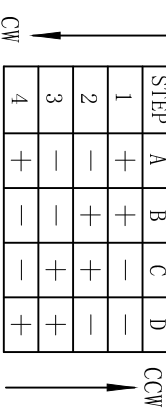

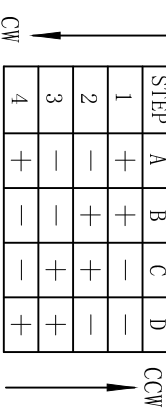



5		6	
版本 (Versions)	修改内容 (Description)	标记 (REV)	日期 (Date)
A0	首次发布	*	2025. 08. 28

S
技术部

00G-WJ0ZXDJZ7-31F9C3SHZ7

B			C																																																
																																																			
D	<table><tr><th colspan="2">character 特性</th><th colspan="2">specifications 规格</th></tr><tr><td>减速比</td><td>Ratio</td><td colspan="2">20:1</td></tr><tr><td>相数</td><td>Number of phase</td><td colspan="2">2</td></tr><tr><td>步距角</td><td>Step Angle</td><td colspan="2">1.8°</td></tr><tr><td>额定电压</td><td>Rated Voltage</td><td colspan="2">DC 3.75V</td></tr><tr><td>额定电流</td><td>Rated current</td><td colspan="2">DC 1.5A</td></tr><tr><td>保持转矩</td><td>Holding Torque</td><td colspan="2">≥ 480mN.m</td></tr><tr><td>相电阻</td><td>Winding resistance</td><td colspan="2">2.5±10% ohm(20℃)</td></tr><tr><td>相电感</td><td>Winding inductaoce</td><td colspan="2">3.5±20% mH (1kHz)</td></tr><tr><td>转动惯量</td><td>Rotor Inertia</td><td colspan="2">68 g.cm²</td></tr><tr><td>电机重量</td><td>Weight</td><td colspan="2">1 Kg</td></tr><tr><td>绝缘等级</td><td>Insulation class</td><td colspan="2">B Class</td></tr></table>		character 特性		specifications 规格		减速比	Ratio	20:1		相数	Number of phase	2		步距角	Step Angle	1.8°		额定电压	Rated Voltage	DC 3.75V		额定电流	Rated current	DC 1.5A		保持转矩	Holding Torque	≥ 480mN.m		相电阻	Winding resistance	2.5±10% ohm(20℃)		相电感	Winding inductaoce	3.5±20% mH (1kHz)		转动惯量	Rotor Inertia	68 g.cm²		电机重量	Weight	1 Kg		绝缘等级	Insulation class	B Class		E
	character 特性		specifications 规格																																																
减速比	Ratio	20:1																																																	
相数	Number of phase	2																																																	
步距角	Step Angle	1.8°																																																	
额定电压	Rated Voltage	DC 3.75V																																																	
额定电流	Rated current	DC 1.5A																																																	
保持转矩	Holding Torque	≥ 480mN.m																																																	
相电阻	Winding resistance	2.5±10% ohm(20℃)																																																	
相电感	Winding inductaoce	3.5±20% mH (1kHz)																																																	
转动惯量	Rotor Inertia	68 g.cm²																																																	
电机重量	Weight	1 Kg																																																	
绝缘等级	Insulation class	B Class																																																	
电气原理图 winding drawing																																																			
F	<table><tr><td colspan="2">励磁顺序vs.旋转方向 Exciting Sequence vs. Direction of Rotation</td><td colspan="2">未注线性尺寸公差 Tolerance for linear and dimensions without indiviiduel tolerance indications GB/T 1804-M eqv ISO 2768-1:M</td></tr><tr><td colspan="2"></td><td colspan="2"></td></tr><tr><td colspan="2">从安装面看为顺时针方向 Clockwise view from mouting side</td><td colspan="2">未注形位尺寸公差 Geometrical tolerance for features without indiviiduel tolerance indications GB/T 1184-K eqv ISO 2768-2:K</td></tr></table>		励磁顺序vs.旋转方向 Exciting Sequence vs. Direction of Rotation		未注线性尺寸公差 Tolerance for linear and dimensions without indiviiduel tolerance indications GB/T 1804-M eqv ISO 2768-1:M						从安装面看为顺时针方向 Clockwise view from mouting side		未注形位尺寸公差 Geometrical tolerance for features without indiviiduel tolerance indications GB/T 1184-K eqv ISO 2768-2:K		F																																				
励磁顺序vs.旋转方向 Exciting Sequence vs. Direction of Rotation		未注线性尺寸公差 Tolerance for linear and dimensions without indiviiduel tolerance indications GB/T 1804-M eqv ISO 2768-1:M																																																	
																																																			
从安装面看为顺时针方向 Clockwise view from mouting side		未注形位尺寸公差 Geometrical tolerance for features without indiviiduel tolerance indications GB/T 1184-K eqv ISO 2768-2:K																																																	
		重庆优摩特科技有限公司 Chongqing UMot technology Co.Ltd.																																																	