



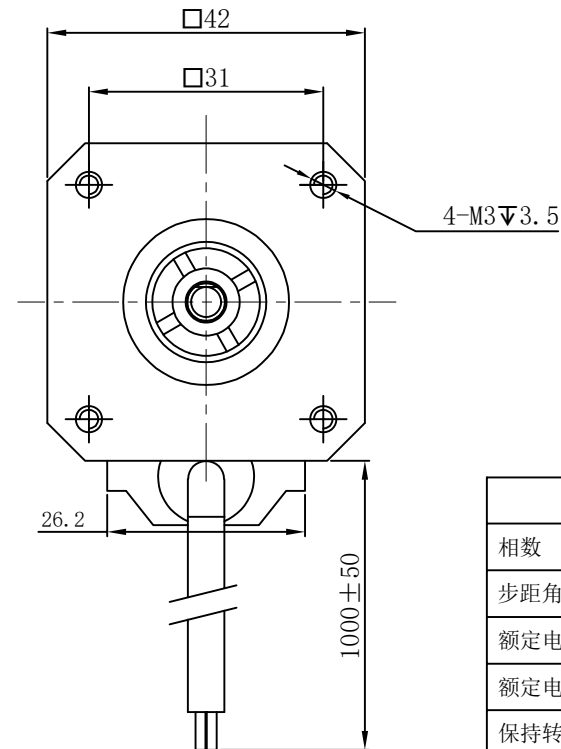

character 特性		specifications 规格
相数	Number of phase	2
步距角	Step Angle	1.8°
额定电压	Rated Voltage	DC 2.7V
额定电流	Rated current	DC 1.5A
保持转矩	Holding Torque	≥ 400mN.m
相电阻	Winding resistance	1.8±10% ohm(20℃)
相电感	Winding inductaoce	3.8±20% mH (1kHz)
防护等级	Protection Level	IP67
绝缘等级	Insulation class	B Class




UNLESS OTHERWISE SPECIFIED, REMOVE ALL BURRS.
BREAK SHARP EDGES 0.5mmMAX.
未注倒角最大0.5mm。

DIMENSIONS ARE IN MILLIMETERS.
TOLERANCES AS BELOW:

尺寸单位为毫米(mm)。未注公差按以下标准：

DECIMALS:	X	±0.38
DECIMALS:	X.X	±0.25
DECIMALS:	X.XX	±0.13
DECIMALS:	X.XXX	±0.013
ANGLES:	±2°	

批准 Approved						重庆优摩特科技有限公司 Chongqing UMot technology Co.Ltd.		
工艺 Technolgy								
审核 Checked								
设计 Inspectde								
名称 Names		签名 Signature		日期 Date				
单位 unit	mm	版本 rev	A0	客户 Customer		物料编号 Item No		
页数 sheet	1/1	比例 scale	1:1	视图 view		型号 Model	42HSF40415-24B-1000H	