


版本 (Versions)	修改内容 (Description)	标记 (REV)	日期 (Date)

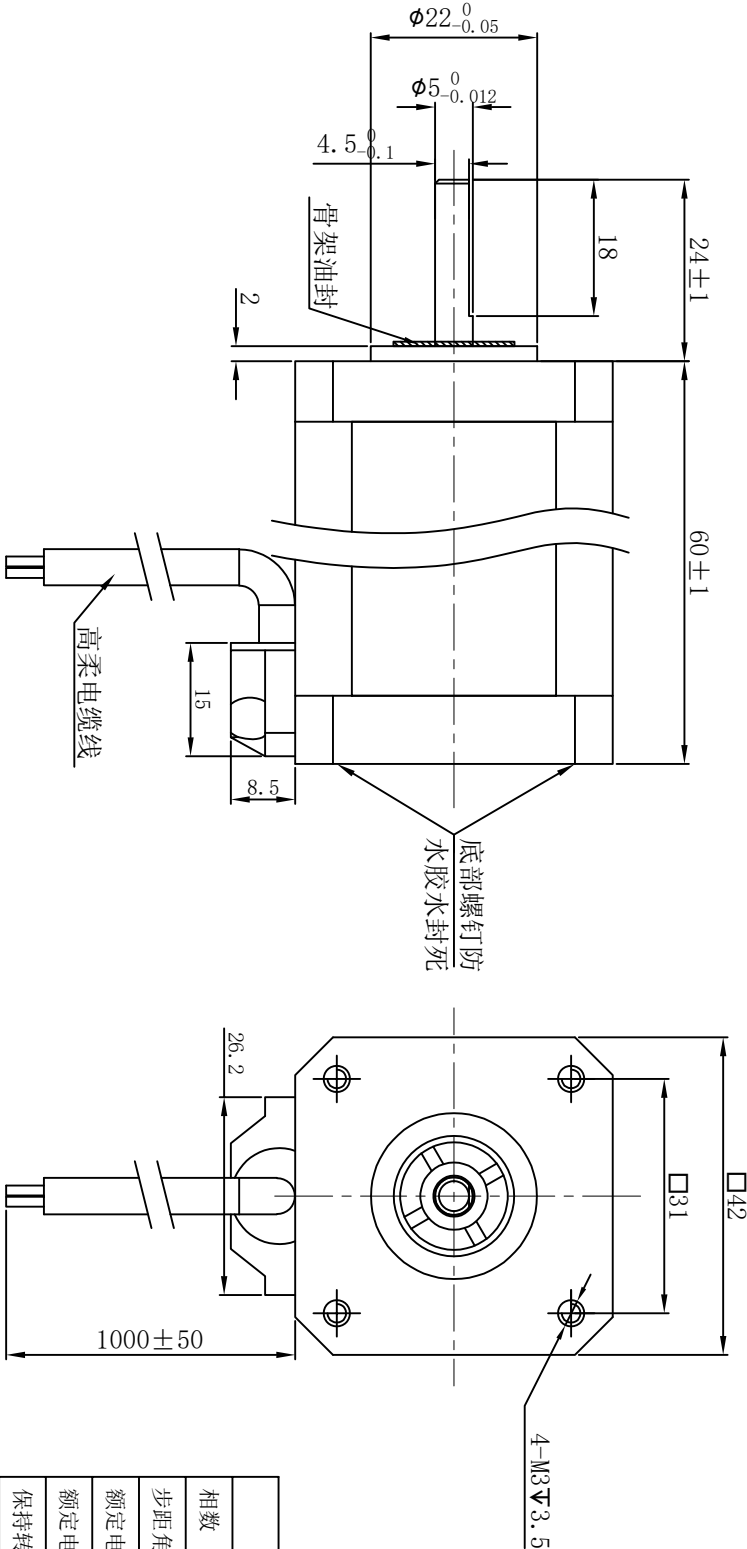

character 特性		specifications 规格
相数	Number of phase	2
步距角	Step Angle	1.8°
额定电压	Rated Voltage	DC 4.2V
额定电流	Rated current	DC 1.8A
保持转矩	Holding Torque	≥ 700mN.m
相电阻	Winding resistance	2.5±10% ohm (20℃)
相电感	Winding inductance	5.4±20% mH (1kHz)
防护等级	Protection Level	IP67
绝缘等级	Insulation class	B Class

电气原理图 winding drawing		励磁顺序 vs. 旋转方向 Exciting Sequence vs. Direction of Rotation		UNLESS OTHERWISE SPECIFIED, REMOVE ALL BURRS. BREAK SHARP EDGES 0.5mmMAX. 未注倒角最大0.5mm。		批准 Approved		工艺 Technology		审核 Checked		设计 Inspectide		名称 Names		签名 Signature		日期 Date		客户 Cus tomer		物料编号 Item No		型号 Model		重庆优摩特科技有限公司 Chongqing Umot technology Co. Ltd.																										
		<table><tr><th>STEP</th><th>A</th><th>B</th><th>C</th><th>D</th></tr><tr><td>1</td><td>+</td><td>+</td><td>-</td><td>-</td></tr><tr><td>2</td><td>-</td><td>+</td><td>+</td><td>-</td></tr><tr><td>3</td><td>-</td><td>-</td><td>+</td><td>+</td></tr><tr><td>4</td><td>+</td><td>+</td><td>-</td><td>+</td></tr></table>		STEP	A	B	C	D	1	+	+	-	-	2	-	+	+	-	3	-	-	+	+	4	+	+	-	+	DIMENSIONS ARE IN MILLIMETERS. TOLERANCES AS BELOW: 尺寸单位为毫米 (mm), 未注公差按以下标准: DECIMALS: X DECIMALS: X.X DECIMALS: X.XX DECIMALS: X.XXX ANGLES: ±2°		1/1		比例 scale		1:1		视图 view												42HSF60418-24B-1000H			
STEP	A	B	C	D																																																
1	+	+	-	-																																																
2	-	+	+	-																																																
3	-	-	+	+																																																
4	+	+	-	+																																																
从安装面看为顺时针方向 Clockwise view from mounting side		CW		CCW																																																