






**符合RoHS指令要求
CONFORM TO RoHS INSTRUCTIONS**

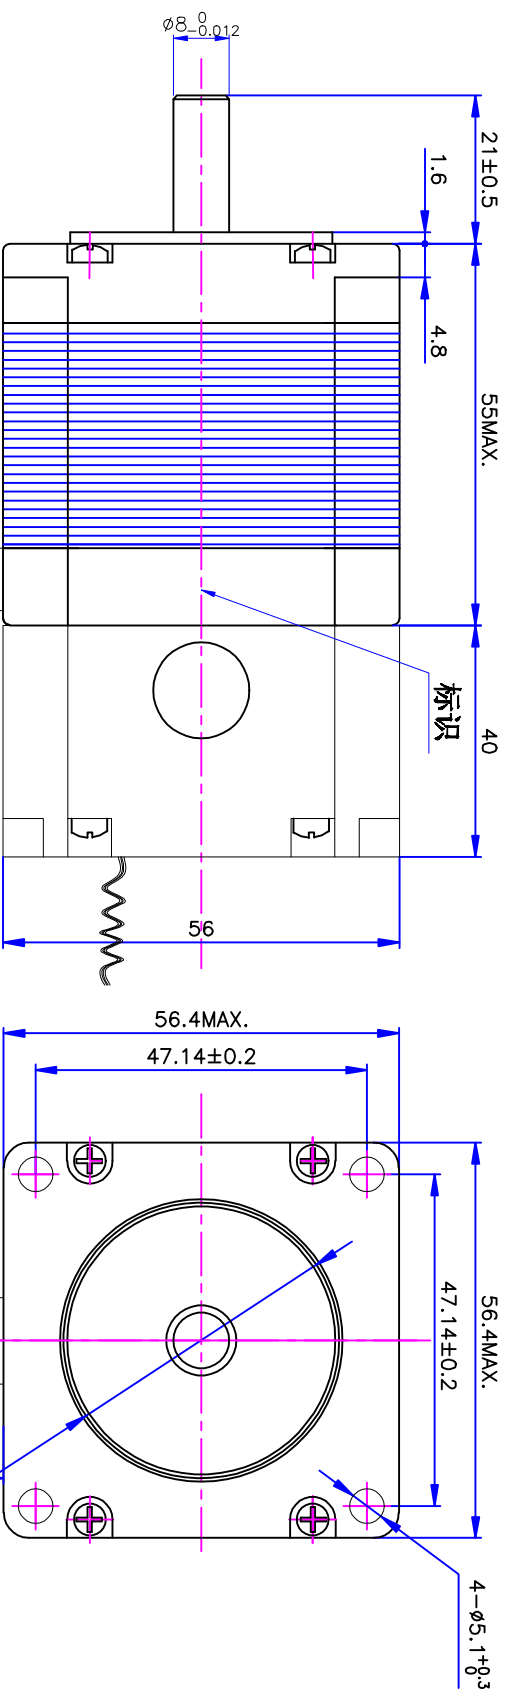

电磁刹车
电压24V 红+黑—

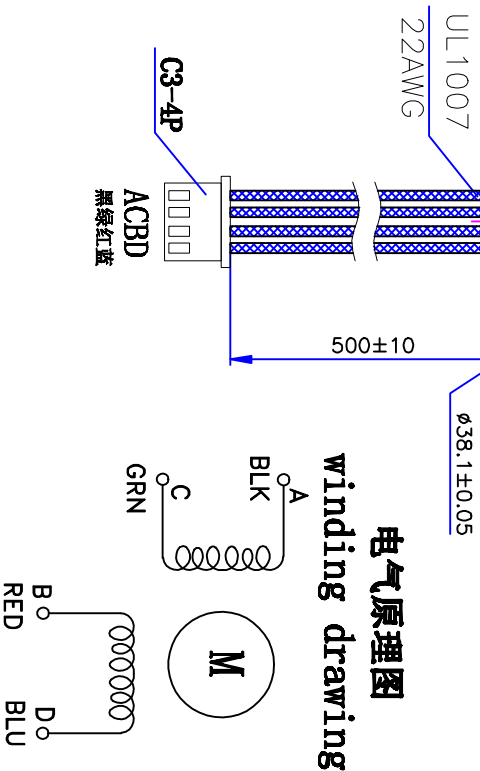

特性 character	规格 specifications
1. 相数 Number of phase	2
2. 步距角 Step Angle	1.8°
3. 额定电压 Rated Voltage	DC 1.7V
4. 额定电流 Rated current	DC 2.0A
5. 保持转矩 Holding Torque	$\geq 950\text{mN} \cdot \text{m}$
6. 相电阻 Winding resistance	$0.85 \pm 10\% \text{ ohm (20}^\circ\text{C)}$
7. 相电感 Winding inductance	$2.5 \pm 20\% \text{ mH (1kHz)}$
8. 转向 (脉冲方向) Direction of rotation	A-AB-B-CW
9. 转动惯量 Rotor Inertia	200 $\text{g} \cdot \text{cm}^2$
10. 电机重量 Weight	1.0Kg
11. 绝缘等级 Insulation class	B Class

									重庆优摩特科技有限公司 Chongqing UMot technology Co., Ltd
						视图 view			
						比例 inverse proportion	1 : 1		
						A0			
标记 REV	修改内容 Description	日期 Date	设计 INSPECTED	审核 CHECKED	批准 APPROVED	日期 Date	版本 version	型号 Model	57HS5417-21SC-500

重庆优摩特科技有限公司
Chongqing Umot technology Co., Ltd